

SUMTER COUNTY
PUBLIC WORKS
SIGNAGE PLANS

BUENOS AIRES OFFICES
 GOLF CART SIGN PLAN

INDEX OF PLANS

SHEET NO.	SHEET DESCRIPTION
1	KEY SHEET
2	GENERAL NOTES
3	PLAN SHEET
4	SPECIAL DETAILS



SUMTER COUNTY COMMISSIONERS
 DISTRICT 1 RICHARD HOFFMAN
 DISTRICT 2 DOUG GILPIN, CHAIRMAN
 DISTRICT 3 DON BURGESS, VICE CHAIRMAN
 DISTRICT 4 GARRY BREEDEN
 DISTRICT 5 RANDY MASK, 2ND VICE CHAIRMAN

SHOP DRAWINGS
 TO BE SUBMITTED TO:
 SUMTER COUNTY
 DEPARTMENT OF PUBLIC WORKS
 319 EAST ANDERSON AVENUE
 BUSHNELL, FLORIDA 33513
 TELEPHONE NO: (352) 793-0204

PLANS PREPARED BY:
VOLKERT 3409 West Lemon Street
 Tampa, Florida 33609
 (813) 875-1365
 www.volkert.com
 Certificate of Authorization No: 4641

NOTE: THE SCALE OF THESE PLANS MAY
 HAVE CHANGED DUE TO REPRODUCTION.

FINAL PLANS
 NOVEMBER 15, 2010

ENGINEER OF RECORD: JANE A. CALDERA
 P.E. NO. 53116

SHEET NO.
1


SUMTER COUNTY PROJECT MANAGER: SCOTT COTTRELL, P.E.

GENERAL NOTES

1. ALL SIGNS, POLES, BACK PLATES AND FOUNDATIONS SHALL COMPLY WITH THE CURRENT VERSION OF "THE VILLAGES CONSTRUCTION AND DEVELOPMENT MANUAL".
2. ALL DISTURBED AREAS SHALL BE REPLACED IN KIND.
3. TYPE OF SOD USED TO RESTORE WITHIN RIGHT-OF-WAY MUST BE IN KIND AND MAINTAINED.
4. THE CONTRACTOR IS RESPONSIBLE FOR UNCOVERING AND SUPPORTING EXISTING UTILITIES DURING ALL CONSTRUCTION ACTIVITIES.
5. THE CONTRACTOR SHALL BE RESPONSIBLE TO SATISFY ALL REQUIREMENTS OF THE REGULATORY AGENCY PERMITS IN REGARD TO CONSTRUCTION ACTIVITIES AND RELATED CONDITIONS.
6. ALL DIMENSIONS SHOWN IN THE PLANS ARE BASED UPON APPROXIMATE FIELD MEASUREMENTS.
7. TREE TRIMMING AND REMOVAL MAY BE REQUIRED TO PROVIDE ADEQUATE SIGHT DISTANCE, OR AS ORDERED BY THE COUNTY ENGINEER.
8. THE COUNTY RESERVES THE RIGHT TO PERFORM QUALITY ASSURANCE TESTING ON ALL MATERIALS DELIVERED TO PROJECT AND TO REJECT ALL MATERIALS NOT MEETING ACCEPTABLE STANDARDS.
9. ALL STREET SIGNS AND STREET MARKERS ARE TO REMAIN UNLESS OTHERWISE NOTED.
10. OVERALL CLEAN-UP SHALL BE ACCOMPLISHED BY THE CONTRACTOR IN ACCORDANCE WITH COUNTY AND FDOT STANDARDS OR AS DIRECTED BY THE ENGINEER. ANY AND ALL EXPENSES INCURRED FOR THIS WORK SHALL BE INCLUDED IN THE UNIT PRICE BID FOR MAINTENANCE OF TRAFFIC AND MOBILIZATION.
11. THE CONTRACTOR SHALL ENDEAVOR TO PROTECT PRIVATE PROPERTY. ANY DAMAGE CAUSED BY THE CONTRACTOR IN THE PERFORMANCE OF HIS WORK SHALL BE CORRECTED TO THE SATISFACTION OF THE ENGINEER AT THE CONTRACTOR'S EXPENSE. PAYMENT SHALL NOT BE MADE FOR THIS WORK.
12. ANY DAMAGE TO STATE, COUNTY, OR LOCAL ROADS CAUSED BY THE CONTRACTOR'S HAULING OR EXCAVATION EQUIPMENT SHALL BE REPAIRED BY THE CONTRACTOR TO THE SATISFACTION OF THE ENGINEER. PAYMENT SHALL NOT BE MADE FOR THIS WORK.
13. ALL EROSION CONTROL FENCES AND BARRIERS SHALL BE ERECTED PRIOR TO ANY LAND ALTERATIONS, MAINTAINED DURING CONSTRUCTION, AND REMOVED FOLLOWING SOIL STABILIZATION AND FINAL DRESSING.
14. ANY U.S.C & G.S. MONUMENT WITHIN LIMITS OF CONSTRUCTION IS TO BE PROTECTED. IF IN DANGER OF DAMAGE, PROJECT ENGINEER SHOULD NOTIFY:
DIRECTOR, NATIONAL GEODETIC SURVEY
1315 EAST WEST HIGHWAY
SILVER SPRING, MARYLAND 20910-2382
PHONE: (301) 713-3242
15. DAYTIME WORK ONLY, THE COUNTY ENGINEER MUST APPROVE NIGHT WORK AND LANE CLOSURES AT LEAST 48 HOURS IN ADVANCE. THE APPLICANT MUST NOTIFY THE SUMTER COUNTY DEPARTMENT OF PUBLIC WORKS OFFICE 48 HOURS IN ADVANCE OF STARTING PROPOSED WORK CALL: THE SUMTER COUNTY DEPARTMENT OF PUBLIC WORKS.
16. THE CONTRACTOR SHALL STOCKPILE ALL SALVAGEABLE MATERIAL PER REQUEST OF THE SUMTER COUNTY DEPARTMENT OF PUBLIC WORKS.
17. EXISTING UTILITIES ARE TO REMAIN IN PLACE UNLESS OTHERWISE NOTED.
18. THE CONTRACTOR SHALL NOTIFY UTILITY OWNERS THROUGH SUNSHINE ONE CALL OF FLORIDA, INC. (1-800-432-4770) TWO BUSINESS DAYS IN ADVANCE OF BEGINNING CONSTRUCTION ON THE JOB SITE.
19. THE CONTRACTOR SHALL APPLY FOR THE, AND OBTAIN, REQUIRED FDEP/NPDES PERMIT.
20. UTILITY COMPANIES HAVE NOT BEEN NOTIFIED OF THIS DESIGN NOR CONSTRUCTION. CONTRACTOR TO NOTIFY ALL INVOLVED UTILITY COMPANIES WITH PLANS FOR COMMENTS.
21. ALL M.O.T. IN THE VICINITY OF THE FDOT RIGHT-OF-WAYS SHALL BE IN ACCORDANCE WITH FDOT INDEX 600 SERIES.
22. THE LOCATION OF SIGN COLUMNS ARE SHOWN AS DIAGRAMMATIC. CONTRACTOR SHALL USE FDOT INDEX # 17302, CASE V, FOR PLACEMENT CRITERIA WHEN INSTALLING SIGN COLUMNS. SIGN COLUMNS MAY BE SHIFTED TO ACCOMMODATE LOCAL CONDITIONS AND EXISTING UNDERGROUND AND OVERHEAD UTILITY LOCATIONS.
23. ALL BASE AND FOUNDATIONS RELATED TO SIGN COLUMN INSTALLATION SHALL COMPLY WITH THE CURRENT VERSION OF "THE VILLAGES CONSTRUCTION AND DEVELOPMENT MANUAL".

FINAL PLANS
NOVEMBER 15, 2010

REVISIONS		PROJECT DESCRIPTION	ENGINEER OF RECORD: VOLKERT, INC. 3409 West Lemon Street Tampa, Florida 33609 Certificate of Authorization No. 00004641 Jane A. Caldera, P.E. No. 53116	SUMTER COUNTY PUBLIC WORKS DIVISION			SHEET NO.
DATE	DESCRIPTION			ROAD NO.	COUNTY	FINANCIAL PROJECT ID	
		BUENOS AIRES OFFICES GOLF CART SIGN PLAN		SUMTER		GENERAL NOTES	2

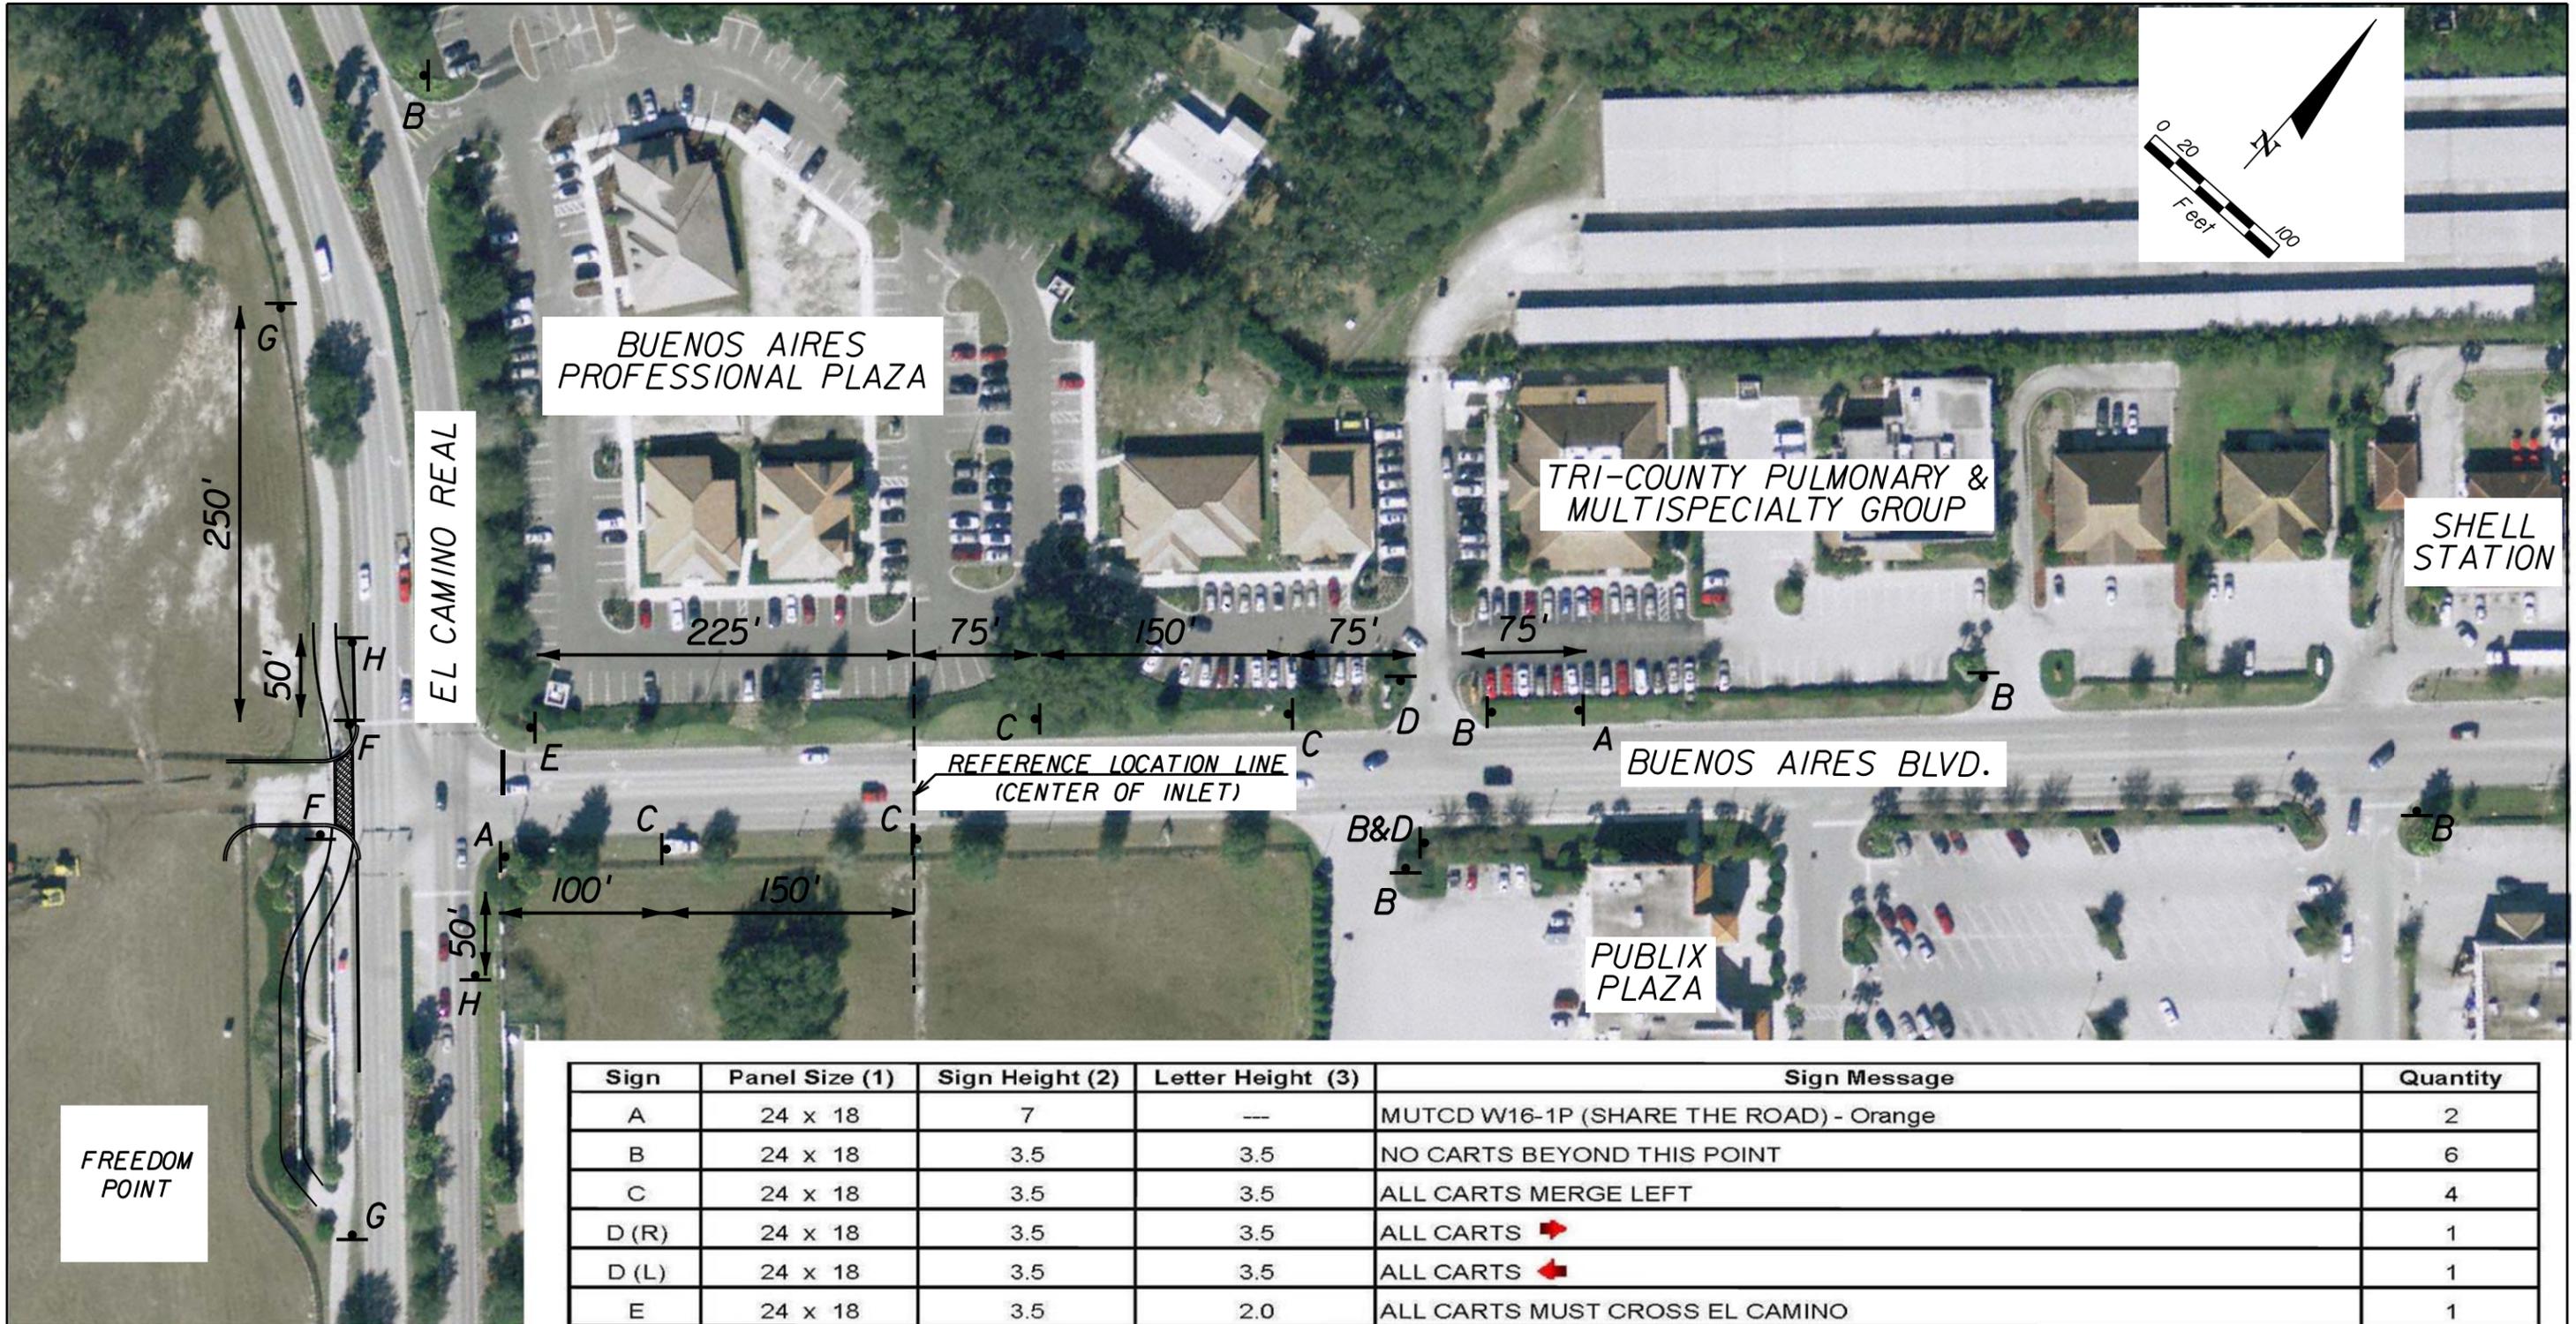


Sign	Panel Size (1)	Sign Height (2)	Letter Height (3)	Sign Message	Quantity
A	24 x 18	7	---	MUTCD W16-1P (SHARE THE ROAD) - Orange	2
B	24 x 18	3.5	3.5	NO CARTS BEYOND THIS POINT	6
C	24 x 18	3.5	3.5	ALL CARTS MERGE LEFT	4
D (R)	24 x 18	3.5	3.5	ALL CARTS →	1
D (L)	24 x 18	3.5	3.5	ALL CARTS ←	1
E	24 x 18	3.5	2.0	ALL CARTS MUST CROSS EL CAMINO	1
F	24 x 18	3.5	1.5	CARTS MUST ENTER BACK OF VEHICLE QUEUE TO CROSS EL CAMINO	2
G	24 x 18	3.5	1.5	CARTS USE TRAFFIC SIGNAL TO ACCESS BUENOS ARIES OFFICES →	2
H	24 x 24	7	---	MUTCD W11-11 (LEFT FACING GOLF CART)	2

NOTES
 (1) - height x width (in inches)
 (2) - sign height is measured from top of pavement surface to bottom of sign panel (in feet)
 (3) - letter height (in inches)

FINAL PLANS
 NOVEMBER 15, 2010


REVISIONS		PROJECT DESCRIPTION	ENGINEER OF RECORD, VOLKERT, INC. 3409 West Lemon Street Tampa, Florida 33609 Certificate of Authorization No. 00004641 Jane A. Caldera, P.E. No. 53116	SUMTER COUNTY PUBLIC WORKS DIVISION			SHEET NO.
DATE	DESCRIPTION			ROAD NO.	COUNTY	FINANCIAL PROJECT ID	
		BUENOS AIRES OFFICES GOLF CART SIGN PLAN	SUMTER			PLAN (1)	3

DECORATIVE 10' 1-3/8" POST DETAIL

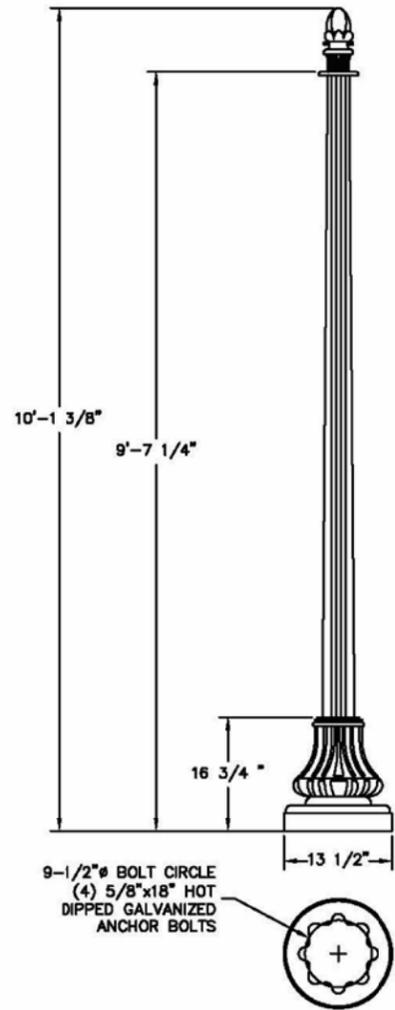

NOTE:
 1. SIGN BACKPLATE IS BOLT ON, CAST ALUMINUM BACK PLATE-
 BLACK POWDER COAT FINISH.
 2. ALL FASTENERS SHALL BE STAINLESS STEEL.
 3. ALL MOUNTED HEIGHTS ARE MEASURED TO BOTTOM OF SIGN.

DECORATIVE SIGN POST BASE DETAIL

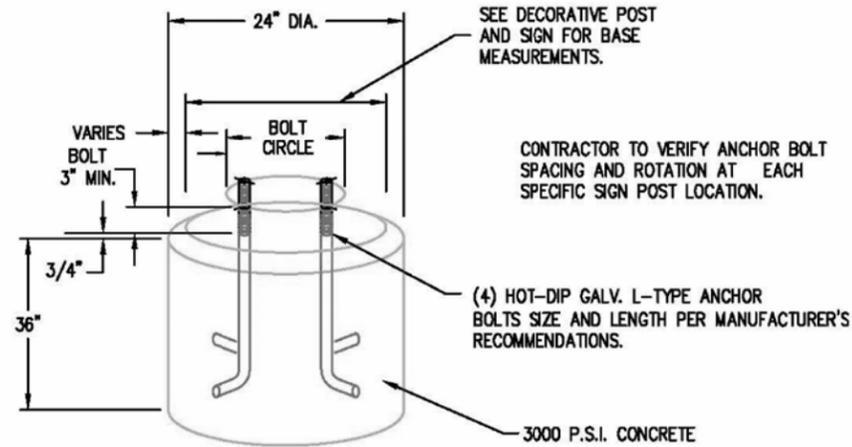


NOTE:
 SET TOP OF BASE 2" ABOVE SURROUNDING FINISHED GRADE.
 CONTRACTOR TO VERIFY ANCHOR BOLT SPACING AND ROTATION
 AT EACH SPECIFIC SIGN POST LOCATION.

FINAL PLANS
 NOVEMBER 15, 2010


SIGN DETAIL FOR GOLF CART SIGNS

ON FLAGLER BASE AND 4" SMOOTH POLE
 FOR GOLF CART USE ONLY

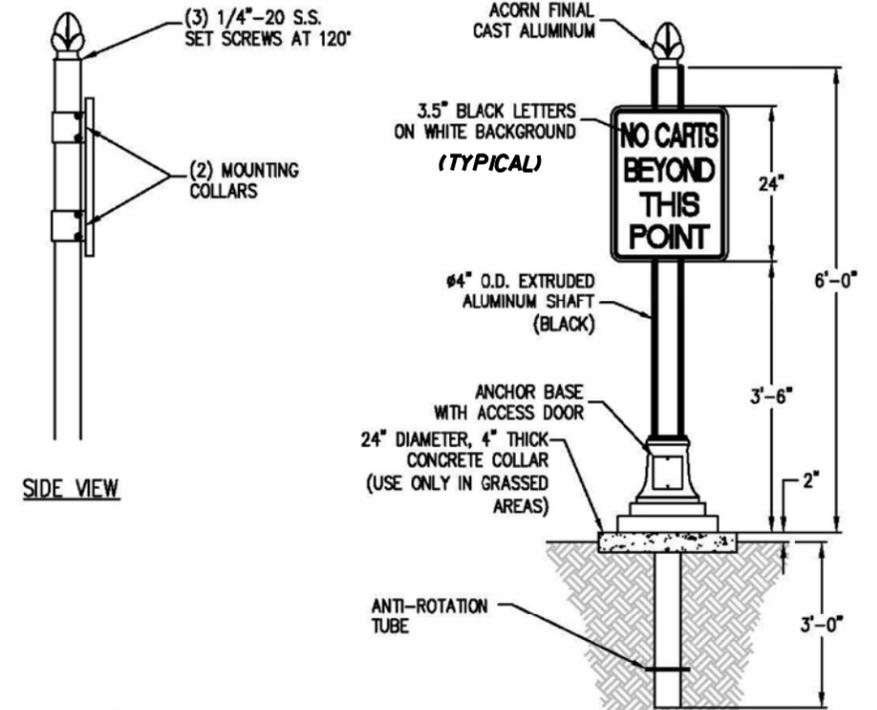


MANUFACTURER: BEACON PRODUCTS
 6503 EAST 19th STREET
 SARASOTA, FL 34243
 CONTACT: VEAZEY LIGHTING GROUP
 TOM VEAZEY
 (407) 843-7620 (OFFICE)
 (321) 689-3450 (CELL)


NOTES:
 1. SIGN BACKPLATE IS EXTRUDED ALUMINUM SLING CHANNEL.
 2. ALL FASTENERS SHALL BE STAINLESS STEEL.
 3. ALL MOUNTED HEIGHTS ARE MEASURED TO BOTTOM OF SIGN.
 4. SIGN NUMBERS FOLLOWED BY AN "A" INDICATE SIGN TO BE
 MOUNTED ON AN EXISTING POLE. CONTRACTOR TO VERIFY POST
 DIAMETER FOR COLLAR SIZE.

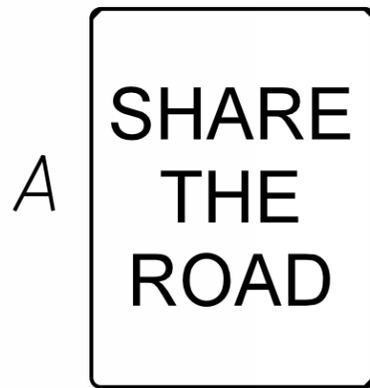


W16-IP (24"X18")

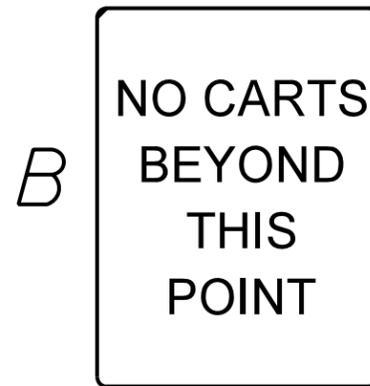


(24"X18")

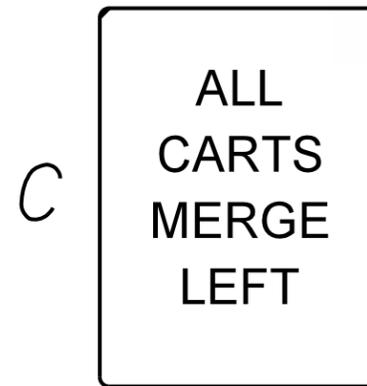


(24"X18")

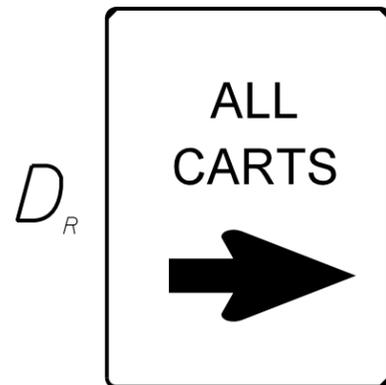


(24"X18")

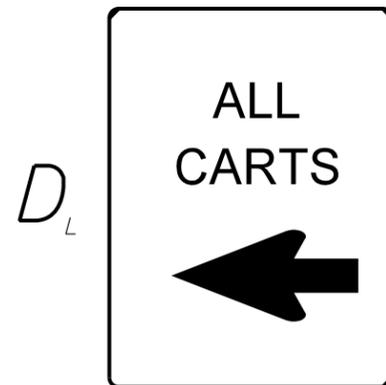

(24"X18")

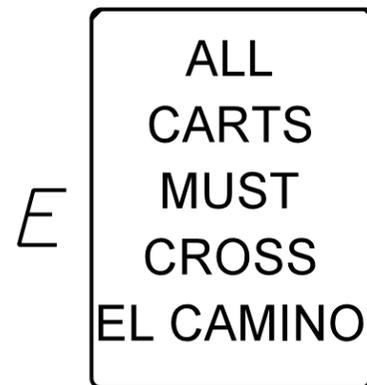

(24"X18")

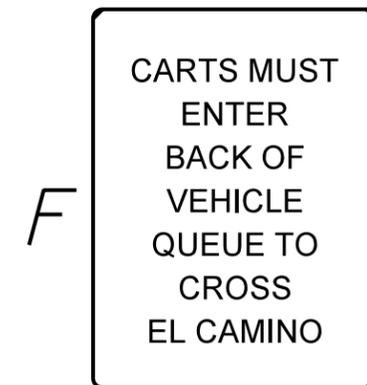

(24"X18")



(24"X18")



W11-II (24"X24")

REVISIONS		PROJECT DESCRIPTION	ENGINEER OF RECORD, VOLKERT, INC. 3409 West Lemon Street Tampa, Florida 33609 Certificate of Authorization No. 00004641 Jane A. Caldera, P.E. No. 53116	SUMTER COUNTY PUBLIC WORKS DIVISION			SHEET NO.
DATE	DESCRIPTION			ROAD NO.	COUNTY	FINANCIAL PROJECT ID	
		BUENOS AIRES OFFICES GOLF CART SIGN PLAN			SUMTER		4

SPECIAL DETAILS