

[Click Here](#) for information on data reliability

USGS 284105001594301 STUART RANCH REPLACEMENT NR CENTER HILL

[Available data for this site](#) [Site home page](#) [GO](#)

Site Description:

LOCATION
 Latitude 28°41'05", Longitude 81°59'43" NAD27,
 Sumter County, Florida, Hydrologic Unit 03100208

WELL TYPE:
 Ground Water

DESCRIPTION
 The depth of the well is not determined.
 Altitude of land surface datum 98 feet above sea level NGVD29
 This well is completed in the FLORIDAN AQUIFER (120FLRD) local aquifer.

AVAILABLE DATA:

Data Type	Begin Date	End Date	Count
Water Quality Samples	1998-09-16	2000-09-13	5
Ground-water Levels	1998-09-16	2005-05-24	12

OPERATION:
 Record for this site is maintained by the USGS Florida - Altamonte Springs Office Water Science Center

CONTACT INFORMATION
 Email questions about this site to FloridaNWISWebDataInquiries

Questions about data [Florida NWISWeb Data Inquiries](#)
 Feedback on this website [Florida NWISWeb Maintainer](#)
 ** USGS 284105001594301 STUART RANCH REPLACEMENT NR CENTER HILL <http://waterdata.usgs.gov/nwis/nwisman?>

Retrieved on 2006-02-17 16:49:46 MST
 Department of the Interior U.S. Geological Survey
 USGS Water Resources of Florida
[Privacy Statement](#) | [Disclaimer](#) | [Accessibility](#) | [FOIA](#)
 119 12.nadwv01

Typ
[Explanation of terms](#)

[Click here](#) for information on data reliability

USGS 2839520202001 8392001 21S23E18 JC 42 PARROTFRANCH

Available data for this site

Site Description

LOCATION

Latitude 28°39'57", Longitude 82°02'20" NAD27,
Sumter County, Florida, Hydrologic Unit 03100208

SITE TYPE:

Ground Water

DESCRIPTION

The depth of the well is 300 feet below land surface.
Altitude of land surface datum 89.50 feet above sea level NGVD29.

AVAILABLE DATA:

Data Type	Begin Date	End Date	Count
Water Quality Statistics	1976-12-15	2000-09-13	49
Ground-water Levels	1976-12-15	2005-09-19	61

OPERATION:

Record for this site is maintained by the USGS Florida - Altamonte Springs Office Water Science Center

CONTACT INFORMATION

Email questions about this site to Florida.NWISWeb.Data.Inquiries

Questions about data

Feedback on this website

[Florida NWISWeb Data Inquiries](#)

[Florida NWISWeb Maintainer](#)

** USGS 2839520202001 8392001 21S23E18 JC 42 PARROTFRANCH

<http://waterdata.usgs.gov/nwis/nwisman?>

Retrieved on 2006-02-17 16:51:58 EST

Department of the Interior U.S. Geological Survey

USGS Water Resources of Florida

[Privacy Statement](#) | [Disclaimer](#) | [Accessibility](#) | [FOIA](#)

LIB LIB-nwv01

[Top](#)

[Explanation of Terms](#)

WARRANTY DEED AND OWNERSHIP INFORMATION

N
c 17.60
TF 18.50
Doc 8050.00
Int
CC 8085.50

This Document Prepared By and Return to:
Michael E. Botos, P.A.
Edwards Angell Palmer & Dodge LLP
One North Clematis Street, Suite 400
West Palm Beach, Florida 33401

Parcel ID Numbers: Q16-001, Q16-002, Q16-003*

Warranty Deed

This Indenture, Made this 14th day of December, 2005 A.D., Between
Jeannie G. Emack and Gail Gragg-Strimenos

of the County of Lake, State of Florida, grantors, and
Florida Crushed Stone Company, a Florida corporation

whose address is: 1501 Belvedere Road, West Palm Beach, FL 33406

of the County of Palm Beach, State of Florida, grantee.

Witnesseth that the GRANTORS, for and in consideration of the sum of
TEN DOLLARS (\$10) DOLLARS,
and other good and valuable consideration to GRANTORS in hand paid by GRANTEE, the receipt whereof is hereby acknowledged, have
granted, bargained and sold to the said GRANTEE and GRANTEE'S heirs, successors and assigns forever, the following described land, situate,
lying and being in the County of Sumter, State of Florida to wit:
Legal Description of "Original Tract"

TOWNSHIP 21 SOUTH, RANGE 23 EAST, SUMTER COUNTY, FLORIDA

All of Section 16, less that part of the S 1/4 thereof lying west of
railroad, and that part of the N 1/2 of NE 1/4 of Section 21 lying
east of railroad and north of State Road 48, subject to right-of-way
of Seaboard Coast Line Railroad Company.

LESS: That part of said Sections 16 and 21 which is described as
follows: Begin at the intersection of the north right-of-way line of
State Road 48 and the eastern right-of-way line of the Seaboard Coast
Line Railroad, run thence northwesterly along said eastern railroad
right-of-way line a distance of 2,500 feet, run thence northeasterly,
perpendicular to the easterly railroad right-of-way a distance of 500
feet, run thence southeasterly, parallel to said eastern railroad
right-of-way line to the north right-of-way line of State Road 48,
thence run westerly along the north right-of-way line of State Road
48 to the POINT OF BEGINNING.

Legal Description of "Beville Tract"
(Continued on Attached)

and the grantors do hereby fully warrant the title to said land, and will defend the same against lawful claims of all persons whomsoever.

In Witness Whereof, the grantors hereunto set their hands and seals the day and year first above written.

Signed, sealed and delivered in our presence:

Jason E. Merritt
Printed Name: Jason E. Merritt
Witness


Jeannie G. Emack (Seal)
Printed Name: Jeannie G. Emack
P.O. Address: 501 Lakeshore Drive, Leesburg, FL 34748

Patricia M. Strong
Printed Name: Patricia M. Strong
Witness

STATE OF Florida
COUNTY OF Lake

The foregoing instrument was acknowledged before me this 14th day of December, 2005 by
Jeannie G. Emack

who is personally known to me or who has produced her Florida driver's license as identification.

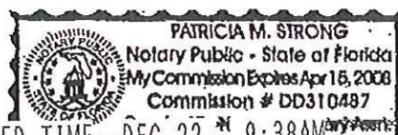

Patricia M. Strong
Printed Name: Patricia M. Strong
Notary Public
My Commission Expires:

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC #8,050.00

12/22/2005 #2005-45597
09:25:38AM B-1498 P-364

RECEIVED TIME DEC. 22. 9:38AM

Signed, sealed and delivered in our presence:

Printed Name: Jason E. Nevitt
Witness

Printed Name: Patricia M. Strong
Witness

Gail Gregg-Strimenos (Seal)
Gail Gregg-Strimenos
P.O. Address: 501 Lakeshore Drive, Leesburg, FL 34748

STATE OF Florida
COUNTY OF Lake

The foregoing instrument was acknowledged before me this 14th day of December, 2005 by Gail Gregg-Strimenos

who is personally known to me or who has produced her Florida driver's license as identification.



Patricia M. Strong
Printed Name: Patricia M. Strong
Notary Public
My Commission Expires:

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC \$8,050.00

12/22/2005 #2005-45597
09:25:38AM B-1498 P-365

Warranty Deed - Page 2

ParcelID Numbers Q16-001, Q16-002, Q16-003*

All of S 1/4 of Section 16 lying West of SAL Railway Right of way, also SE 1/4 of SE 1/4 of Section 17, also NE 1/4 of NE 1/4 of Section 20, also all of the N 1/4 of Section 21, lying West of the SAL Railway Right of Way less begin at the SE corner of the NW 1/4 of the NE 1/4 of said Section 21 and run North 20 feet to the Point of Beginning; Thence run Westerly parallel with paved road 234.5 feet; Thence turn at right angles and run in a Northerly direction 512 feet to a stake; Thence turn at a right angle and run in an Easterly direction 322 feet to the SAL Railway Right of Way, Thence turn an internal angle of 111 degrees 25 minutes and proceed along SAL Railway Right of Way for a distance of 546 feet, thence turn an internal angle of 68 degrees and 25 minutes and proceed parallel with paved road in a Westerly direction 287 feet to the Point of Beginning. All of the above property being in Township 21 South, Range 23 East, and containing 305 acres, more or less.

LESS AND EXCEPT THE FOLLOWING:

All that part of Sections 16 and 21, Township 21 South - Range 23 East described as follows:

Commencing at the South Quarter Corner of Section 16 thence East 438 ft. along the South Section Line of said Section 16 to the Point of Beginning; Thence North 1320 feet to the North line of the S 1/4 of Section 16; Thence East 65 feet along the North boundary line of said S 1/4 to the Westerly boundary of SAL Railway Right of Way Line, Thence S 21°-30' E2265 feet along the former Westerly SAL Right of Way Line, Thence West 322 feet, Thence South 512 feet to the North Right of Way Line of S.R. 48, Thence West 576 feet along said North Road Right of Way Line, Thence North 1300 feet to the Point of Beginning, All being part of Sections 16 and 21, Township 21 South - Range 23 East, Sumter County, Florida and containing 30 acres M.O.L.

Legal Description of "Covart Property"

The East 1/4 of the Northeast 1/4 and the Northeast 1/4 of the Southeast 1/4 of Section 17, Township 21 South, Range 23 East, Sumter County, Florida.

TOGETHER WITH: (1) all rents, issues, profits, appurtenances, incorporeal hereditaments, easements, privileges and rights of way; (2) all rights to land lying in the bed of any street opened or proposed against which the Property abuts to the center line thereof; (3) all Seller's right in and to any strips or goras of land adjoining the Property; (4) Seller's right in and to any condemnation award made or to be made or for damages caused by change of grade of adjacent streets; (5) Seller's rights, if any, to the use of or to the land underlying any canal or waterway which abuts or traverses the Property, in whole or in part; (6) water rights of every type and nature appurtenant to or otherwise relating to the Property; (7) intangible rights, including licenses and the exclusive right to use the present name of the property; if specifically known by such name, however such right may have been acquired by Seller; (8) development applications, petitions, permits, approvals, plans and specifications, utility agreements, impact fee recovery agreements, drainage, retention or detention rights, vested or "grandfathered" development rights, site plans, development orders, building permits and such other documents as relate to the condition or development of the Property; and (9) any and all other amenities, rights and privileges enjoyed, claimed, owned or used by Seller in connection with the Property.

Subject to conditions, restrictions, reservations and easements of record; taxes for the year 2006 and all subsequent years.

THE LAND DESCRIBED HEREIN IS NOT THE HOMESTEAD OF THE GRANTORS AND NEITHER THE GRANTORS NOR THE GRANTORS SPOUSE; NOR ANYONE FOR WHOSE SUPPORT THE GRANTORS ARE RESPONSIBLE, RESIDES ON OR ADJACENT TO SAID LAND.

(Continued on Attached)

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT

DOC #8,050.00

12/22/2005 #2005-45597
09:25:38AM B-1498 P-366

Warranty Deed - Page 3

Parcel ID Numbers: Q16-001, Q16-002, Q16-003*

*Additional account numbers: Q16-100; Q16-200; Q17-009; Q17-011;
Q20-001; Q21-001; Q21-002; Q21-100;

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC \$8,050.00

12/22/2005 #2005-45597
09:25:38AM B-1498 P-367

ExN 9.00
3C 9.50
1F 70
Doc
Int
CC 19.20

This Document Prepared By and Return to:
Michael E. Botos, P.A.
Edwards Angell Palmer & Dodge LLP
One North Clematis Street, Suite 400
West Palm Beach, Florida 33401

Parcel ID Numbers: Q16-001, Q16-001, Q16-003*

Warranty Deed

This Indenture, Made this 15th day of December, 2005 A.D., Between
Fred B. Gregg, Jr.

of the County of Lake, State of Florida, grantor, and
Florida Crushed Stone Company, a Florida corporation

whose address is: 1501 Belvedere Road, West Palm Beach, Florida 33406

of the County of Palm Beach, State of Florida, grantee.

Witnesseth that the GRANTOR for and in consideration of the sum of
TEN DOLLARS (\$10) DOLLARS,
and other good and valuable consideration to GRANTOR in hand paid by GRANTEE, the receipt whereof is hereby acknowledged, has
granted, bargained and sold to the said GRANTEE and GRANTEE'S heirs, successors and assigns forever, the following described land, situate,
lying and being in the County of Sumter State of Florida to wit:
Legal Description of "Original Tract"

TOWNSHIP 21 SOUTH, RANGE 23 EAST, SUMTER COUNTY, FLORIDA

All of Section 16, less that part of the S 1/4 thereof lying west of
railroad, and that part of the N 1/2 of NE 1/4 of Section 21 lying
east of railroad and north of State Road 48, subject to right-of-way
of Seaboard Coast Line Railroad Company.

LESS: That part of said Sections 16 and 21 which is described as
follows: Begin at the intersection of the north right-of-way line of
State Road 48 and the eastern right-of-way line of the Seaboard Coast
Line Railroad, run thence northwesterly along said eastern railroad
right-of-way line a distance of 2,500 feet, run thence northeasterly,
perpendicular to the easterly railroad right-of-way a distance of 500
feet, run thence southeasterly, parallel to said eastern railroad
right-of-way line to the north right-of-way line of State Road 48,
thence run westerly along the north right-of-way line of State Road
48 to the POINT OF BEGINNING.

Subject to conditions, restrictions, reservations and easements of
record; taxes for the year 2006 and all subsequent years.
(Continued on Attached)

and the grantor does hereby fully warrant the title to said land, and will defend the same against lawful claims of all persons whomsoever.

In Witness Whereof, the grantor has hereunto set his hand and seal the day and year first above written.

Signed, sealed and delivered in our presence:

[Signature]
Printed Name: Kevin Tufford
Witness

[Signature] (Seal)
Fred B. Gregg, Jr.
P.O. Address: 1300 Citizens Blvd, Suite 300
Leesburg, FL 34748

[Signature]
Printed Name: Thomas E. [unclear]
Witness

STATE OF Florida
COUNTY OF Lake

The foregoing instrument was acknowledged before me this 15th day of December, 2005 by
Fred B. Gregg, Jr.

who is personally known to me or who has produced his Florida driver's license as identification.

[Signature]
Printed Name: Tara Hall
Notary Public
My Commission Expires:

Tara Hall

MY COMMISSION # DD253765 EXPIRES
September 28, 2007
BONDED THROUGH TROY FARM INSURANCE, INC.

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC \$0.70

12/22/2005 #2005-45598
09:27:19AM B-1498 P-368

Warranty Deed - Page 2

Parcel ID Number: Q16-001, Q16-001, Q16-003*

THE LAND DESCRIBED HEREIN IS NOT THE HOMESTEAD OF THE GRANTOR AND NEITHER THE GRANTOR NOR THE GRANTOR'S SPOUSE, NOR ANYONE FOR WHOSE SUPPORT THE GRANTOR IS RESPONSIBLE, RESIDES ON OR ADJACENT TO SAID LAND.

*Additional account numbers: Q16-100; Q16-200; Q17-009; Q17-011; Q20-001; Q21-001; Q21-002; Q21-100.

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC \$0.70

12/22/2005 #2005-45598
09:27:19AM B-1498 P-369

XNF
Rec 9.00
TF 0.50
Doc 1.70
Int
CC 19.20

This Document Prepared By and Return to:
Michael E. Botos, P.A.
Edwards Angell Palmer & Dodge LLP
One North Clomatis Street, Suite 400
West Palm Beach, Florida 33401

Parcel ID Number: Q16-001, Q16-002, Q16-003*

Warranty Deed

This Indenture, Made this 15th day of December, 2005 AD, Between Pamela S. Gregg as to an undivided 1/3 interest in any and all minerals and subsurface rights as to that portion of the property described herein below.

of the County of Lake, State of Florida, grantor, and Florida Crushed Stone Company, a Florida corporation

whose address is: 1501 Belvedere Road, West Palm Beach, Florida 33406

of the County of Palm Beach, State of Florida, grantee.

Witnesseth that the GRANTOR, for and in consideration of the sum of TEN DOLLARS (\$10) DOLLARS, and other good and valuable consideration to GRANTEE in hand paid by GRANTEE, the receipt whereof is hereby acknowledged, has granted, bargained and sold to the said GRANTEE and GRANTEE'S heirs, successors and assigns forever, the following described land, situate, lying and being in the County of Sumter, State of Florida to wit:
Legal Description of "Original Tract"

TOWNSHIP 21' SOUTH, RANGE 23 EAST, SUMTER COUNTY, FLORIDA

ALL of Section 16, less that part of the S 1/4 thereof lying west of railroad, and that part of the N 1/2 of NE 1/4 of Section 21 lying east of railroad and north of State Road 48, subject to right-of-way of Seaboard Coast Line Railroad Company.

LESS: That part of said Sections 16 and 21 which is described as follows: Begin at the intersection of the north right-of-way line of State Road 48 and the eastern right-of-way line of the Seaboard Coast Line Railroad, run thence northwesterly along said eastern railroad right-of-way line a distance of 2,500 feet, run thence northeasterly, perpendicular to the easterly railroad right-of-way a distance of 500 feet, run thence southeasterly, parallel to said eastern railroad right-of-way line to the north right-of-way line of State Road 48, thence run westerly along the north right-of-way line of State Road 48 to the POINT OF BEGINNING.

(Continued on Attached)

and the grantor does hereby fully warrant the title to said land, and will defend the same against lawful claims of all persons whomsoever.

In Witness Whereof, the grantor has hereunto set her hand and seal this day and year first above written.

Signed, sealed and delivered in our presence:

Kevin Tuffa
Printed Name: Kevin Tuffa
Witness

Pamela S. Gregg (Seal)
Printed Name: Pamela S. Gregg
P.O. Address: 1005 S. Caballo Road
Leesburg, FL 34748

Thomas Edetra
Printed Name: Thomas Edetra
Witness

STATE OF Florida
COUNTY OF Lake

The foregoing instrument was acknowledged before me this 15th day of December, 2005 by Pamela S. Gregg

who is personally known to me or who has produced her Florida driver's license as identification.

Tara Hall
Printed Name: Tara Hall
Notary Public
My Commission Expires: September 28, 2007
Tara Hall
MY COMMISSION # DD253766 EXPIRES
September 28, 2007
BONDED THROUGH TROY FARM INSURANCE, INC.

PAMELA

Form Generated by © DeSjey Systems, Inc. 2003 (LS) 763-5555 Form FLWD-1



RECEIVED TIME DEC. 22. 9:38AM

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC \$0.70

12/22/2005 #2005-45599
09:27:43AM B-1498 P-370

Warranty Deed - Page 2

ParcelID Numbers: Q16-001, Q16-002, Q16-003*

Subject to conditions, restrictions, reservations and easements of record; taxes for the year 2006 and all subsequent years.

THE LAND DESCRIBED HEREIN IS NOT THE HOMESTEAD OF THE GRANTOR AND NEITHER THE GRANTOR NOR THE GRANTOR'S SPOUSE, NOR ANYONE FOR WHOSE SUPPORT THE GRANTOR IS RESPONSIBLE, RESIDES ON OR ADJACENT TO SAID LAND.

*Additional account numbers: Q16-100; Q16-200; Q17-009; Q17-011; Q20-001; Q21-001; Q21-002; Q21-100.

SUMTER COUNTY, FLORIDA
GLORIA HAYWARD, CLERK OF CIRCUIT COURT
DOC \$0.70

12/22/2005 #2005-45599
09:27:43AM B-1498 P-371

2010 LIMITED LIABILITY COMPANY ANNUAL REPORT

DOCUMENT# M08000003758

FILED
Mar 03, 2010
Secretary of State

Entity Name: CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC

Current Principal Place of Business:

1501 BELVEDERE ROAD
TAX DEPT
WEST PALM BEACH, FL 33406 US

New Principal Place of Business:

920 MEMORIAL CITY WAY
SUITE 100
HOUSTON, TX 77024 US

Current Mailing Address:

1501 BELVEDERE ROAD
TAX DEPT
WEST PALM BEACH, FL 33406 US

New Mailing Address:

FEI Number: 26-3068068 FEI Number Applied For () FEI Number Not Applicable () Certificate of Status Desired ()

Name and Address of Current Registered Agent:

CORPORATE CREATIONS NETWORK, INC.
11380 PROSPERITY FARMS ROAD #221E
PALM BEACH GARDENS, FL 33410 US

Name and Address of New Registered Agent:

The above named entity submits this statement for the purpose of changing its registered office or registered agent, or both, in the State of Florida.

SIGNATURE:

Electronic Signature of Registered Agent

Date

MANAGING MEMBERS/MANAGERS:

Title: MGR
Name: PEREZ, GILBERTO
Address: 920 MEMORIAL CITY WAY, STE. 100
City-St-Zip: HOUSTON, TX 77024

Title: MGR
Name: ANGELLE, FRANK
Address: 920 MEMORIAL CITY WAY, STE. 100
City-St-Zip: HOUSTON, TX 77024

Title: MGR
Name: WHITE, LESLIE S
Address: 920 MEMORIAL CITY WAY, STE. 100
City-St-Zip: HOUSTON, TX 77024

Title: PRES
Name: WATSON, KARL H JR.
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: VP
Name: CAPASSO, ROBERT J
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: VP
Name: LYONS, PETER
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

I hereby certify that the information indicated on this report is true and accurate and that my electronic signature shall have the same legal effect as if made under oath; that I am a managing member or manager of the limited liability company or the receiver or trustee empowered to execute this report as required by Chapter 608, Florida Statutes.

SIGNATURE: LESLIE S WHITE

MGR

03/03/2010

Electronic Signature of Signing Managing Member, Manager, or Authorized Representative / Date

162030



600133682736

08/04/08--01002--012 **55.00

(Requestor's Name)

(Address)

(Address)

(City/State/Zip/Phone #)

PICK-UP WAIT MAIL

(Business Entity Name)

(Document Number)

Certified Copies _____ Certificates of Status _____

Special Instructions to Filing Officer:

Office Use Only

B. KOHR
AUG - 1 2008
EXAMINER

FILED
08 AUG - 1 PM 4: 15
SECRETARY OF STATE
TALLAHASSEE, FLORIDA

August 1, 2008

Department of State, Florida
Clifton Building
2611 Executive Center Circle
Tallahassee FL 32301

08 AUG - 1 PM 4: 15
FILED
SECRETARY OF STATE
TALLAHASSEE, FLORIDA

Re: Order #: 7316798 SO
Customer Reference 1: None Given
Customer Reference 2: .

Dear Department of State, Florida:

Please file the attached:

Rinker Materials of Florida, Inc. (FL)
Conversion
Florida

Rinker Materials of Florida, Inc. (FL)
Obtain Document - Misc - Certified Copy of Certificate of Conversion
Florida

Enclosed please find a check for the requisite fees. Please return evidence of filing(s) to the attention of the undersigned.

If for any reason the enclosed cannot be filed upon receipt, please contact the undersigned immediately at (850) 222-1092. Thank you very much for your help.

Sincerely,

Joel Rodriguez
Fulfillment Manager
joel.rodriguez@wolterskluwer.com

08 AUG - 1 PM 4: 15
SECRETARY OF STATE
TALLAHASSEE, FLORIDA

CERTIFICATE OF CONVERSION
OF
RINKER MATERIALS OF FLORIDA, INC.
(a Florida corporation)

TO
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC
(a Delaware limited liability company)

FILED
AUG - 1 11 PM 4: 15
TALLAHASSEE, FLORIDA
SECRETARY OF STATE

This Certificate of Conversion is being duly executed, delivered and filed by the undersigned to convert Rinker Materials of Florida, Inc., a Florida corporation (the "Company"), to CEMEX Construction Materials Florida, LLC, a Delaware limited liability company, pursuant to Section 607.1113 of the Florida Statutes. 160

1. The Company has been converted into a Delaware limited liability company named "CEMEX Construction Materials Florida, LLC" (the "LLC") in compliance with Chapter 607 of the Florida Statutes (the "Conversion"), and the Conversion complies with the applicable laws governing the LLC.

2. The Plan of Conversion providing for the Conversion was adopted and approved by the consent of the Board of Directors and the sole shareholder of the Company in accordance with Chapter 607 of the Florida Statutes.

3. The effective date of the Conversion shall be the date that the Certificate of Conversion and Certificate of Formation of the LLC are filed with the Secretary of State of the State of Delaware (the "Effective Time").

4. The registered address of the LLC in the State of Delaware is c/o Corporate Creations Network Inc., 3411 Silverside Road, Rodney Building No. 104, Wilmington, New Castle County, Delaware 19810.

5. The LLC appoints the Florida Secretary of State as its agent for service of process in a proceeding to enforce obligations of the Company, including any appraisal rights of shareholders of the Company under Sections 607.1301 - 607.1333 of the Florida Statutes, and the street and mailing address of an office which the Florida Department of State may use for purposes of Section 607.1114(4) of the Florida Statutes is: c/o Corporate Creations Network Inc., 3411 Silverside Road, Rodney Building No. 104, Wilmington, New Castle County, Delaware 19810.

6. The LLC has agreed to pay any shareholder of the Company having appraisal rights the amount to which they are entitled under Sections 607.1301 - 607.1333 of the Florida Statutes.

IN WITNESS WHEREOF, the undersigned has executed this Certificate of
Conversion this 1st day of AUGUST, 2008.

RINKER MATERIALS OF FLORIDA, INC.

By: Leslie S. White
Name: Leslie S. White
Title: Vice President

P93000084726

CORPORATION(S) NAME

Florida Crushed Stone Company

0

FILED
01 MAR 28 PM 3:08
SECRETARY OF STATE
TALLAHASSEE, FLORIDA

- Profit
- Amendment
- Nonprofit
- Foreign
- Limited Partnership
- LLC
- Certified Copy
- Call When Ready
- Walk In
- Mail Out
- Dissolution/Withdrawal
- Reinstatement
- Annual Report
- Name Registration
- Fictitious Name
- Photocopies
- Call If Problem
- Will Wait
- Merger
- Mark
- Other
- Change of RA
- UCC
- CUS
- After 4:30
- Pick Up

EFFECTIVE DATE
04-01-01

RECEIVED
01 MAR 28 AM 11:12
DIVISION OF CORPORATION

Name _____
Availability _____
Document _____
Examiner _____
Updater _____
Verifier _____
W.P. Verifier _____

3/27/01

Order#: 3892142

Ref#: _____
01041-014
-03/28/01-01041-014
*****35.00 *****35.00
Amount: \$ _____

660 East Jefferson Street
Tallahassee, FL 32301
Tel. 850 222 1092
Fax 850 222 7615

G. GOULLETTE MAR 28 2001

RESTATED ARTICLES OF INCORPORATION
OF
FLORIDA CRUSHED STONE COMPANY

Florida Crushed Stone Company, a corporation organized and existing under and by virtue of the Florida Business Corporation Act (the "FBCA"), which was originally incorporated under the name Tempco, Inc., and whose original Articles of Incorporation of the corporation were filed with the Secretary of State of the State of Florida on December 13, 1993, does hereby restate, integrate and amend its Articles of Incorporation, as previously amended, in their entirety to read as follows:

ARTICLES OF INCORPORATION
OF
FLORIDA CRUSHED STONE COMPANY

ARTICLE I

The name of this corporation shall be:

FLORIDA CRUSHED STONE COMPANY

ARTICLE II

The principal street address of the corporation is:

1501 Belvedere Road
West Palm Beach, Florida 33406

ARTICLE III

The general purpose or purposes for which the corporation is organized are as follows:

(1) To engage in every aspect and phase of the business of mining, processing, and selling any and all kinds of minerals and other substances and to engage in every aspect and phase of related businesses.

(2) To transact any and all other lawful businesses for which a corporation may be incorporated under the Florida Business Corporation Act.

ARTICLE IV

The corporation has the authority, acting through its board of directors, to issue not more than 100,000 shares of a single class having a par value of \$1.00 per share which shall be referred to as "common shares."

FILED
01 MAR 28 PM 3:08
SECRETARY OF STATE
TALLAHASSEE, FLORIDA

EFFECTIVE DATE
04-01-01

ARTICLE V

No director of this corporation shall be personally liable to this corporation or its shareholders for monetary damages for any statement, vote, decision, or failure to act, regarding corporate management or policy, as a director, except to the extent that such exemption from liability or limitation thereof is not permitted under the Florida Business Corporation Act. If the Florida Business Corporation Act is amended after the effective date of this Article V to authorize corporate action further eliminating or limiting the personal liability of directors, then the liability of directors of this corporation shall be eliminated or limited to the fullest extent permitted by the Florida Business Corporation Act as so amended. Any repeal or modification of this Article V by the shareholders of this corporation shall not adversely affect any right or protection of a director of this corporation existing at the time of such repeal or modification.

* * *

These Restated Articles of Incorporation shall become effective at 12:01 a.m. April 1, 2001.

DULY EXECUTED and delivered by the undersigned on March 16, 2001, effective as of 12:01 a.m. April 1, 2001.

Florida Crushed Stone Company

By: Blair E. Stump

Blair E. Stump
Vice President

* * * * *

RESTATED ARTICLES OF INCORPORATION
OF
FLORIDA CRUSHED STONE COMPANY

Florida Crushed Stone Company, a corporation organized and existing under and by virtue of the Florida Business Corporation Act (the "FBCA"), which was originally incorporated under the name Tempco, Inc., and whose original Articles of Incorporation of the corporation were filed with the Secretary of State of the State of Florida on December 13, 1993, does hereby restate, integrate and amend its Articles of Incorporation, as previously amended, in their entirety to read as follows:

ARTICLES OF INCORPORATION
OF
FLORIDA CRUSHED STONE COMPANY

ARTICLE I

The name of this corporation shall be:

FLORIDA CRUSHED STONE COMPANY

ARTICLE II

The principal street address of the corporation is:

1501 Belvedere Road
West Palm Beach, Florida 33406

ARTICLE III

The general purpose or purposes for which the corporation is organized are as follows:

- (1) To engage in every aspect and phase of the business of mining, processing, and selling any and all kinds of minerals and other substances and to engage in every aspect and phase of related businesses.
- (2) To transact any and all other lawful businesses for which a corporation may be incorporated under the Florida Business Corporation Act.

ARTICLE IV

The corporation has the authority, acting through its board of directors, to issue not more than 100,000 shares of a single class having a par value of \$1.00 per share which shall be referred to as "common shares."

ARTICLE V

No director of this corporation shall be personally liable to this corporation or its shareholders for monetary damages for any statement, vote, decision, or failure to act, regarding corporate management or policy, as a director, except to the extent that such exemption from liability or limitation thereof is not permitted under the Florida Business Corporation Act. If the Florida Business Corporation Act is amended after the effective date of this Article V to authorize corporate action further eliminating or limiting the personal liability of directors, then the liability of directors of this corporation shall be eliminated or limited to the fullest extent permitted by the Florida Business Corporation Act as so amended. Any repeal or modification of this Article V by the shareholders of this corporation shall not adversely affect any right or protection of a director of this corporation existing at the time of such repeal or modification.

* * *

These Restated Articles of Incorporation shall become effective at 12:01 a.m. April 1, 2001.

DULY EXECUTED and delivered by the undersigned on March 16, 2001, effective as of 12:01 a.m. April 1, 2001.

Florida Crushed Stone Company

By: Blair E. Stump
Blair E. Stump
Vice President

* * * * *

CERTIFICATE
WITH RESPECT TO
RESTATED ARTICLES OF INCORPORATION
OF
FLORIDA CRUSHED STONE COMPANY

The undersigned does hereby certify:

1. That he is the duly appointed and acting Vice President of Florida Crushed Stone Company, a Florida corporation (the "Corporation"), and authorized to execute and deliver this certificate on behalf of the Corporation;

2. That the restated articles of incorporation attached to and hereby made a part of this certificate were duly adopted by the Board of Directors on March 16, 2001;

3. That the amendments adopted are as follows:

(a) To add Articles II and V of the restated articles of incorporation attached to and hereby made a part of the certificate;

(b) To delete Articles II, V and VII through XII of the articles of incorporation as in effect prior to this restatement as no longer necessary in accordance with the provisions of Section 607.0202 Florida Statutes;

(c) To delete Article IV of the articles of incorporation as in effect prior to this restatement and to substitute in lieu thereof Article IV of the restated articles of incorporation attached to and hereby made a part of this certificate;

(d) To delete Article VI of the articles of incorporation as in effect prior to this restatement in accordance with the provisions of Section 607.1002(3) Florida Statutes [initial registered office and agent];

and that the amendments made pursuant to subsections (a) through (d) above were duly adopted by the sole shareholder on March 16, 2001 in accordance with the provisions of Section 607.1003 Florida Statutes.

4. The restated articles of incorporation shall become effective at 12:01 a.m. April 1, 2001.

DULY EXECUTED and delivered by the undersigned on March 16, 2001, effective as of
12:01 a.m. on April 1, 2001.

Florida Crushed Stone Company

By: Blair E. Stump
Blair E. Stump
Vice President

* * * * *

CERTIFICATE
WITH RESPECT TO
RESTATED ARTICLES OF INCORPORATION
OF
FLORIDA CRUSHED STONE COMPANY

The undersigned does hereby certify:

1. That he is the duly appointed and acting Vice President of Florida Crushed Stone Company, a Florida corporation (the "Corporation"), and authorized to execute and deliver this certificate on behalf of the Corporation;

2. That the restated articles of incorporation attached to and hereby made a part of this certificate were duly adopted by the Board of Directors on March 16, 2001;

3. That the amendments adopted are as follows:

(a) To add Articles II and V of the restated articles of incorporation attached to and hereby made a part of the certificate;

(b) To delete Articles II, V and VII through XII of the articles of incorporation as in effect prior to this restatement as no longer necessary in accordance with the provisions of Section 607.0202 Florida Statutes;

(c) To delete Article IV of the articles of incorporation as in effect prior to this restatement and to substitute in lieu thereof Article IV of the restated articles of incorporation attached to and hereby made a part of this certificate;

(d) To delete Article VI of the articles of incorporation as in effect prior to this restatement in accordance with the provisions of Section 607.1002(3) Florida Statutes [initial registered office and agent];

and that the amendments made pursuant to subsections (a) through (d) above were duly adopted by the sole shareholder on March 16, 2001 in accordance with the provisions of Section 607.1003 Florida Statutes.

4. The restated articles of incorporation shall become effective at 12:01 a.m. April 1, 2001.

DULY EXECUTED and delivered by the undersigned on March 16, 2001, effective as of
12:01 a.m. on April 1, 2001.

Florida Crushed Stone Company

By: Blair E. Stump
Blair E. Stump
Vice President

* * * * *

2006 FOR PROFIT CORPORATION ANNUAL REPORT

DOCUMENT# F96000005704

Entity Name: RINKER MATERIALS CORPORATION

FILED
Apr 11, 2006
Secretary of State

Current Principal Place of Business:

1501 BELVEDERE ROAD
WEST PALM BEACH, FL 33406 US

New Principal Place of Business:

Current Mailing Address:

1501 BELVEDERE ROAD
WEST PALM BEACH, FL 33406 US

New Mailing Address:

FEI Number: 58-1416933 FEI Number Applied For () FEI Number Not Applicable () Certificate of Status Desired ()

Name and Address of Current Registered Agent:

ERIC, BELHART
1501 BELVEDERE ROAD
WEST PALM BEACH, FL 33406 US

Name and Address of New Registered Agent:

The above named entity submits this statement for the purpose of changing its registered office or registered agent, or both, in the State of Florida.

SIGNATURE:

Electronic Signature of Registered Agent

Date

Election Campaign Financing Trust Fund Contribution ()

OFFICERS AND DIRECTORS:

ADDITIONS/CHANGES TO OFFICERS AND DIRECTORS:

Title: V () Delete
Name: ZERN, MICHAEL R
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: DP () Delete
Name: CLARKE, DAVID V
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: D () Delete
Name: BERGER, DAVID V
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: V () Delete
Name: STUMP, BLAIR E
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: S () Delete
Name: EGAN, MIKE F
Address: 1501 BELVEDERE ROAD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: T () Delete
Name: BURMEISTER, THOMAS G
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

I hereby certify that the information supplied with this filing does not qualify for the for the exemption stated in Chapter 119, Florida Statutes. I further certify that the information indicated on this report or supplemental report is true and accurate and that my electronic signature shall have the same legal effect as if made under oath; that I am an officer or director of the corporation or receiver or trustee empowered to execute this report as required by Chapter 607, Florida Statutes; and that my name appears above, or on an attachment with an address, with all other like empowered.

SIGNATURE: MICHAEL R. ZERN

V

04/11/2006

Electronic Signature of Signing Officer or Director

Date

2006 FOR PROFIT CORPORATION ANNUAL REPORT

DOCUMENT# P93000084726

Entity Name: FLORIDA CRUSHED STONE COMPANY

FILED
Apr 11, 2006
Secretary of State

Current Principal Place of Business:

1501 BELVEDERE RD.
WEST PALM BEACH, FL 33406

New Principal Place of Business:

Current Mailing Address:

1501 BELVEDERE RD.
WEST PALM BEACH, FL 33406

New Mailing Address:

FEI Number: 59-3215445 FEI Number Applied For () FEI Number Not Applicable () Certificate of Status Desired ()

Name and Address of Current Registered Agent:

CORPORATE CREATIONS NETWORK, INC.
11380 PROSPERITY FARMS ROAD #221E
PALM BEACH GARDENS, FL 33410 US

Name and Address of New Registered Agent:

The above named entity submits this statement for the purpose of changing its registered office or registered agent, or both, in the State of Florida.

SIGNATURE: Electronic Signature of Registered Agent Date

Election Campaign Financing Trust Fund Contribution ()

OFFICERS AND DIRECTORS:

Title: CD () Delete
Name: CLARKE, DAVID V
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: PD () Delete
Name: WATSON, SR, KARL H
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: VTD () Delete
Name: BURMEISTER, THOMAS G
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: S () Delete
Name: BRITTAIN, PAUL A J
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: AS () Delete
Name: STUMP, BLAIR E
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

ADDITIONS/CHANGES TO OFFICERS AND DIRECTORS:

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: () Change () Addition
Name:
Address:
City-St-Zip:

Title: S (X) Change () Addition
Name: BRITTAIN, PAUL A, J
Address: 1501 BELVEDERE RD
City-St-Zip: WEST PALM BEACH, FL 33406

Title: () Change () Addition
Name:
Address:
City-St-Zip:

I hereby certify that the information supplied with this filing does not qualify for the for the exemption stated in Chapter 119, Florida Statutes. I further certify that the information indicated on this report or supplemental report is true and accurate and that my electronic signature shall have the same legal effect as if made under oath; that I am an officer or director of the corporation or receiver or trustee empowered to execute this report as required by Chapter 607, Florida Statutes; and that my name appears on the report, or on an attachment with an address, with all other like empowered.

SIGNATURE: BLAIR E STUMP AS 04/11/2006
Electronic Signature of Signing Officer or Director Date

**2009 ANNUAL WATER LEVEL ANALYSIS
CENTER HILL MINE
SUMTER COUNTY, FLORIDA
SWFWMD GENERAL WATER USE PERMIT NO. 20000213.009
FOR
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC**

**2009 ANNUAL WATER LEVEL ANALYSIS
CENTER HILL MINE
SUMTER COUNTY, FLORIDA
SOUTHWEST FLORIDA WATER MANAGEMENT DISTRICT
GENERAL WATER USE PERMIT NO. 20000213.009
for
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC**

Prepared by:

THE COLINAS GROUP, INC.
Lakeland, Florida

January 28, 2010

Project No. S-262AC

TABLE OF CONTENTS

SECTION	PAGE
1.0 INTRODUCTION	1
2.0 HYDROLOGIC MONITORING	2
2.1 Background Information	2
2.1.1 Onsite Ground Water Monitor Wells and Piezometers	2
2.1.2 Offsite Background Monitor Wells	2
2.1.3 Offsite Wetland Piezometers	3
2.1.4 Surface Water Staff Gages	3
2.1.5 Surface Water Flow, Pumpage and Discharge Monitoring Devices	3
2.1.6 Rainfall Monitoring Device	4
2.2 Monitoring Methodology	4
2.2.1 Ground Water Level Monitoring	4
2.2.2 Surface Water Level Monitoring	4
2.2.3 Surface Water Flow, Pumpage and Discharge Monitoring	4
2.2.4 Rainfall Monitoring	6
3.0 DATA ANALYSIS	7
3.1 Ground Water Elevation Trends	7
3.1.1 Regional Ground Water Elevation Trend	7
3.1.2 Localized Ground Water and Surface Water Elevation Trend	7
3.1.3 Potentiometric Surface Analysis	8
3.2 Assessment of Hydraulic Barrier Ditch Effectiveness	9
3.2.1 Evaluation of 2009 Ground Water and Surface Water Elevation Data	9
3.2.2 Quarry B-1 Pumpage and Floridan Aquifer Recharge	10
4.0 SINKHOLE MONITORING SURVEY	11
4.1 Introduction	11
4.2 Sinkhole Monitoring Methodology	11
4.2.1 Aerial Photograph Review	11
4.2.2 Ground Truthing Reconnaissance	12
4.2.3 FGS Sinkhole Database Review	12
4.2.4 Contiguous Landowner Contacts	12
4.2.5 Sinkhole Monitoring Survey Inspection	12
4.3 Findings	13
5.0 SUMMARY AND CONCLUSIONS	14

TABLE OF CONTENTS (continued)

LIST OF TABLES

Table 1	2009 Hydrologic Monitoring Plan
Table 2	2009 Ground Water Elevation Data Summary
Table 3	2009 Surface Water Elevation Data Summary
Table 4	2009 Surface Water Pumpage Summary
Table 5	2009 Rainfall Data Summary
Table 6	2009 Ground Water Drawdown/Mounding Data Summary

LIST OF FIGURES

Figure 1	Site Map
Figure 2	Offsite Monitor Well, Piezometer and Staff Gage Locations

APPENDICES

Appendix A	Ground Water Elevations Graph A-1, Monitor Wells MW-13, MW-17 and MW-27 Graph A-2, Monitor Wells MW-19, MW-20 and MW-21 Graph A-3, Monitor Wells MW-50, MW-55, MW-60, MW-64 and MW-66 Graph A-4, Monitor Wells MW-51, MW-61, MW-67 and MW-68 Graph A-5, Monitor Wells MW-69, MW-70, MW-71 and MW-72 Graph A-6, Background Monitor Wells BG-1, BG-2, BG-3 and BG-4
Appendix B	Surface Water Elevations Graph B-1, Staff Gages SG-1, SG-11, SG-22, SG-24, SG-29 and SG-90 Graph B-2, Staff Gages SG-18, SG-28, SG-57 and SG-73
Appendix C	Surface Water Flow Graph C-1, Jumper Creek West Outfall Monthly Surface Water Flow Calculations - Jumper Creek West Outfall
Appendix D	Surface Water Pumpage Graph D-1, West Quarry II / Quarry B-1
Appendix E	Rainfall Graph E-1, Rain Gage RG-1
Appendix F	Rainfall / Ground Water Elevation Comparison Graph F-1, Sumter County Average Annual Rainfall Totals versus

TABLE OF CONTENTS (continued)

City of Webster Well Average Annual Ground Water Elevations

Appendix G Ground Water Drawdown / Mounding
Graph G-1, Departures of Interpolated vs Actual Ground Water Elevations

Appendix H Sinkhole Monitoring Survey Attachments

THE COLINAS GROUP, INC.
ENGINEERING AND ENVIRONMENTAL CONSULTANTS

January 28, 2010

Cemex Construction Materials Florida, LLC
11430 Camp Mine Road
Brooksville, FL 34601

Attention: Mr. James Morris
Environmental Manager

Re: 2009 Annual Water Level Analysis Report
Center Hill Mine
Sumter County, Florida
SWFWMD General Water Use Permit No. 20000213.009
for Cemex Construction Materials Florida, LLC

Dear Mr. Morris:

The Colinas Group, Inc., (TCG) is pleased to submit the 2009 annual water level analysis report for Cemex Construction Materials Florida, LLC's (Cemex) Center Hill Mine, located in Sumter County, Florida. This report is being submitted in accordance with requirements outlined in Special Conditions 6.J. and 6.L. of the facility's General Water Use Permit (WUP) No. 20000213.009, which was approved by the Southwest Florida Water Management District (SWFWMD) on July 13, 2007.

The WUP incorporates an Environmental Management and Monitoring Plan (EMMP) that was submitted to SWFWMD (the District) in May 2006. The EMMP outlines specific activities designed to identify potential impacts to adjacent properties and water supply wells, wetlands, ground water levels and surface water features resulting from mining activities at the Center Hill Mine.

As outlined in the WUP, water level analysis reports are to be prepared semiannually to provide evaluations of all water level monitoring activities at the mine, as they relate to dewatering and water handling operations. The annual water level analysis report, covering the previous calendar year, is to be prepared and submitted with the Florida Department of Environmental Protection (FDEP) Environmental Resource Permit (ERP) annual mine report due on January 31, and with the District's annual mine report due on March 1 of the following year. Each annual water level analysis report is to include a sinkhole monitoring report.

The following water level analysis report summarizes water level monitoring activities at the Center Hill Mine for the period from January 1 through December 31, 2009, however, additional historical data is utilized throughout the report for clarification and presentation purposes.

Cemex Construction Materials Florida, LLC
January 28, 2010
Page 2

Thank you for the opportunity to be of continued service to Cemex. If you have any questions regarding this report, please call.

Yours very truly,

THE COLINAS GROUP, INC.
Engineering and Environmental Consultants



Mark R. Stephens, P.G., P.E.
Principal Consultant

attachments
six (6) copies submitted

cc: Mr. Fred Crabill, Southeast Environmental Solutions, Inc.

**2009 ANNUAL WATER LEVEL ANALYSIS
CENTER HILL MINE
SUMTER COUNTY, FLORIDA
SWFWMD GENERAL WATER USE PERMIT NO. 20000213.009
FOR
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC**

1.0 INTRODUCTION

On July 13, 2007, the Southwest Florida Water Management District (SWFWMD) approved the most recent modification to the General Water Use Permit (WUP) Number 20000213.009 for Cemex Construction Materials Florida, LLC's (Cemex) Center Hill Mine, located in Sumter County, Florida. The WUP incorporates an Environmental Management and Monitoring Plan (EMMP) that was submitted to SWFWMD (the District) in May 2006. The EMMP outlines specific activities designed to identify potential impacts to adjacent properties and water supply wells, wetlands, ground water levels and surface water features resulting from mining activities at the Center Hill Mine.

As outlined in the WUP, water level analysis reports are to be prepared semiannually to provide evaluations of all water level monitoring activities at the mine, as related to dewatering and water handling operations. The annual water level analysis report, covering the previous calendar year, is to be prepared and submitted with the Florida Department of Environmental Protection (FDEP) Environmental Resource Permit (ERP) annual mine report due on January 31, and with the District's annual mine report due on March 1 of the following year. Each annual water level analysis report is to include a sinkhole monitoring report.

The following water level analysis report summarizes water level monitoring activities at the Center Hill Mine for the period from January 1 through December 31, 2009, however, additional historical data is utilized throughout the report for clarification and presentation purposes.

2.0 HYDROLOGIC MONITORING

2.1 Background Information

2.1.1 Onsite Ground Water Monitor Wells and Piezometers

Ground water level data is collected at the Center Hill Mine from a network of 19 onsite monitor wells (MW-13, MW-17, MW-19 through MW-21, MW-27, MW-50, MW-51, MW-55, MW-60, MW-61, MW-64 and MW-66 through MW-72) and one onsite wetland piezometer (PZ-56). Monitor wells MW-69 through MW-72 were installed in 2006 in anticipation of a proposed extension of the mine. The extension was subsequently approved, and mining is currently ongoing in Quarry B-1.

The current water monitoring schedule for the Center Hill Mine provides for the weekly collection of water level data that generally occurs on Wednesday of each week. The locations of the onsite ground water monitoring stations are shown on **Figure 1**, and **Table 1** provides a summary of information related to all of the hydrologic monitoring stations at the Center Hill Mine.

Although the WUP has not yet been modified, one revision to the monitoring plan was implemented in 2008 with regard to ground water level monitoring; the collection of water level readings was discontinued at piezometer PZ-58 (located in Wetland C-2) after surface water elevations in West Quarry I and West Quarry II equilibrated in February 2008.

2.1.2 Offsite Background Monitor Wells

Background ground water level data is collected on a weekly basis from four offsite monitor wells (BG-1 through BG-4). Wells BG-1 through BG-3 are part of a network of Floridan aquifer wells monitored by the U.S. Geological Survey (USGS). Cemex secured site access agreements with owners of the Stuart Ranch (BG-1) and the Cowart Ranch (BG-3) in 2006, and the collection of water level measurements was initiated immediately thereafter. Well BG-2 (located in the City of Webster) is also monitored by SWFWMD's Supervisory Control and Data Acquisition (SCADA) system. Ground water elevation data for well BG-2 is downloaded on a monthly basis from the District's SCADA webpage. The data is selected to correlate with the dates during which the weekly water monitoring events are conducted at the mine.

In May 2008, Cemex located a new background well (BG-4) on property owned by The Menaleous Land Group, LLC (approximately 1.8 miles southeast of the mine site), and secured permission from the ranch foreman to collect water level data at the site. The top of casing elevation for the well was established by a licensed land surveyor, referenced to the National Geodetic Vertical Datum of 1929 (NGVD29), and the collection of water level measurements was initiated at the site in June 2008. The locations of the four offsite background ground water monitor wells are shown on **Figure 2**.

2.1.3 Offsite Wetland Piezometers

In January 2007, Cemex secured site access agreements and completed the installation of two offsite wetland piezometers on properties owned by James (Guy) Simmons (PZ-OS1) and Mildred Stevenson (PZ-OS2). Following installation, the top of casing elevations for each well were established (in feet NGVD29) by a licensed land surveyor, and the collection of weekly water level measurements was initiated. In May 2007, piezometer PZ-OS1 was removed at the request of Mr. Simmons. The location of offsite wetland piezometer PZ-OS2 is shown on **Figure 2**.

2.1.4 Surface Water Staff Gages

At present, surface water level data is collected from a network of 12 onsite staff gages (SG-1, SG-11, SG-18, SG-22, SG-24, SG-28, SG-29, SG-57, SG-73, SG-79, SG-80 and SG-90) and one offsite wetland staff gage (SG-OS2), using the same weekly schedule as the ground water monitor wells and piezometers. Although the WUP has not yet been modified, two revisions to the monitoring plan were implemented in 2008 with regard to surface water level monitoring:

- 1) the collection of water level readings was discontinued at staff gage SG-59 (located in Wetland C-2) after surface water elevations in West Quarry I and West Quarry II equilibrated in February 2008; and,
- 2) a new staff gage (SG-90) was installed to monitor surface water levels at Quarry B-1 in April 2008.

The locations of the onsite staff gages are shown on **Figure 1**, and the location of the offsite wetland staff gage is shown on **Figure 2**. As noted in the previous water level analysis report, all of the staff gages have been configured to provide direct readings of surface water elevation, referenced to NGVD29.

2.1.5 Surface Water Flow, Pumpage and Discharge Monitoring Devices

Surface water flow is measured at the Jumper Creek North (JC-North) and Jumper Creek East (JC-East) transects, using a portable, propeller-type, battery-powered stream flowmeter. Flow is also measured at the Jumper Creek West (JC-West) outfall structure using a self-contained, submersible pressure transducer. Surface water pumpage data is collected from hour meters installed on the two Quarry B-1 dewatering pumps, and surface water discharge data is collected at the D-001 outfall and the HBD-2 discharge structure using pressure transducers similar to the unit installed at the JC-West outfall. The locations of the surface water flow, pumpage and discharge monitoring stations are shown on **Figure 1**.

2.1.6 Rainfall Monitoring Device

In January 2006, a tipping-bucket rain gage (RG-1) was installed at the former location of the HBD-1 outfall structure, and the device was connected to a battery-powered datalogger. In July 2006, the gage was moved to a new location near the D-001 outfall, in accordance with a stipulation contained in the WUP. The location of the rainfall monitoring station is shown on **Figure 1**.

2.2 Monitoring Methodology

2.2.1 Ground Water Level Monitoring

Ground water level measurements are obtained from monitor wells and piezometers at the site with an electric water level indicator, with readings recorded to the nearest 0.01 foot. The readings are entered into a computerized field data sheet that calculates ground water elevations by subtracting the depth-to-water measurements (from the top of the well casing to the water surface) from the surveyed top-of-well casing elevations (referenced to NGVD29). Copies of each weekly field data sheet are filed at the mine office, and a second copy is retained by Cemex field personnel for future reference.

Data from the field data sheets are transferred to a computerized spreadsheet that provides a tabular summary and a number of graphical displays charting ground water elevations over time. **Table 2** provides a summary of ground water elevation data collected at the Center Hill Mine during calendar year 2009, and the accompanying graphs are included in **Appendix A**.

2.2.2 Surface Water Level Monitoring

As previously mentioned, all surface water level monitoring staff gages at the site have been configured to provide direct readings of surface water elevation, referenced to NGVD 29. The staff gage readings are rounded to the nearest 0.1 foot to allow for water level variations resulting from wave action. The staff gage readings are entered on the weekly data sheets, and the information is later transferred to the computer spreadsheet for data reduction and presentation purposes. **Table 3** summarizes surface water elevation data collected at the site during 2009, and the accompanying graphs are included in **Appendix B**.

2.2.3 Surface Water Flow, Pumpage and Discharge Monitoring

The installation of cross-sections at the JC-North and JC-East transects was completed in accordance with specifications outlined in the National Handbook of Recommended Methods for Water-Data Acquisition (USGS, 1977, revised 1980). Using the methods outlined in the document, flow readings at each transect are recorded at two-foot intervals across the stream, and the resulting values are combined to calculate the instantaneous cross-sectional flow, in million gallons per day.

The pressure transducer installed at the JC-West outfall records hydraulic head pressure readings on an internal, battery-powered datalogger that is installed in the bed of the creek directly upstream from the outfall structure. During each end-of-month monitoring event (when flow has been observed during the previous month), the datalogger is retrieved and the data is downloaded to a laptop computer. Using a proprietary computer software program, the hydraulic pressure readings are converted to water level measurements. The resulting values are input to standard flow equations to calculate flow through the outfall structures in million gallons per day (mgd). Weekly flow quantities are calculated by adding the daily total volumes for the preceding week.

In February 2009, surface water flow began reporting from a solution feature in the bed of Jumper Creek, approximately 1,000 feet upstream from the SG-18 staff gage location (DID #18) near the northwest corner of the mine property. The appearance of surface water in this segment of the creek was believed to be related to rising water levels in West Quarry II and, as a result, flow readings were reported at the JC-West Outfall (DID #81) for the first time since April 2006 when the current drought caused flow to cease in Jumper Creek. Surface water continued to flow sporadically at this location throughout the remainder of the year, however, it should be noted that no surface water flow was observed at either of the two Jumper Creek monitoring stations upstream of the solution feature (JC-North and JC-East). **Appendix C** includes a series of tables and an accompanying graph that summarize the surface water flow data collected at the JC-West Outfall during 2009.

The hour meters installed on the two dewatering pumps in Quarry B-1 record the time periods during which the pumps are operational. In 2007 and 2008, the volumetric output of each pump was measured with an ultrasonic flowmeter that was attached to the discharge piping. Pumpage is calculated by multiplying the weekly hours of operation by the measured output of the pumps, in gallons per hour. The values are then added together to calculate the total dewatering pumpage routed to West Quarry II via the Hydraulic Barrier Ditch (HBD). **Table 4** summarizes the surface water pumpage data collected from Quarry B-1 during 2009, and the data is shown on the graph provided in **Appendix D** (along with historical pumpage data from the now deactivated West Quarry II).

The pressure transducer at the D-001 outfall records hydraulic head pressure readings on a datalogger installed in the bed of the engineered swale that conveys water from the inactive North Quarry to Jumper Creek. A similar system was installed in March 2008 at a new discharge structure (HBD-2) that conveys surface water pumped from Quarry B-1 to West Quarry II via the Hydraulic Barrier Ditch. The dataloggers are retrieved during each end-of-month monitoring event (when flow has been observed during the previous month) and the data is processed for analysis as previously described. Weekly discharge quantities are calculated by adding the daily total volumes for the preceding week. During calendar year 2009, no surface water discharges were recorded at the D-001 outfall.

2.2.4 Rainfall Monitoring

The tipping bucket rain gage records daily rainfall quantities and stores the data in an internal, battery-powered datalogger. The data is downloaded to a laptop computer during each end-of-month monitoring event and transferred into a spreadsheet program. Once transferred to the spreadsheet, the measurements can be tallied to provide rainfall measurements for any give time period.

For reporting purposes, the daily values are added to provide weekly rainfall totals. **Table 5** summarizes the rainfall data for 2009, and the accompanying graph is included in **Appendix E**. Due to intermittent malfunctions of the gage, rainfall data for portions of the year were obtained from a nearby SWFWMD SCADA system rainfall monitoring station (Station No. 9074) located in Webster, Florida.

3.0 DATA ANALYSIS

3.1 Ground Water Elevation Trends

3.1.1 Regional Ground Water Elevation Trend

In the 2008 annual water level analysis report (submitted in February 2009), the regional decline in ground water elevations was attributed primarily to below-normal rainfall over the area, a condition that extended back to September 2005. A graph included in Appendix E of the 2008 report provided a comparison of average annual rainfall totals for Sumter County versus the average annual ground water elevations for a SWFWMD-monitored Floridan aquifer well located in the City of Webster (approximately three miles southwest of the site) during the period from 1978 through 2008. In general, the graph showed a good correlation between the two hydrologic parameters.

Appendix F in this current report provides an updated graph of the same parameters. The rainfall data shows that the 2009 average annual rainfall for Sumter County (51.16 inches) was higher than in the previous several years, but remained slightly below the long-term (1915 through 2009) average for the county (52.06 inches). Despite the regional increase in rainfall, the 2009 average ground water elevation in the Webster well (79.37 feet NGVD29) dropped by approximately 1.2 feet from the previous year. Although ground water levels in the Webster well typically exhibit a strong correlation with regional rainfall amounts, a review of the data shown in Graph E-1 shows that similar anomalies have occurred on at least three occasions since 1978 (1984-85, 1996-97 and 2006-2007).

3.1.2 Localized Ground Water and Surface Water Elevation Trend

The localized trend in ground water elevations at the Center Hill Mine was evaluated by reviewing the data records for the 19 onsite ground water monitor wells and the four offsite background wells. A review of the 2009 ground water elevation data for the 12 onsite property boundary monitor wells (MW-19 through MW-21, MW-50, MW-51, MW-55, MW-60, MW-61, MW-64 and MW-66 through MW-68) and the four background wells (BG-1 through BG-4) shows a gradual decline in ground water elevations between January and mid-May, an increase in elevations through the beginning of September, then another gradual decline through the end of December. Based on these data, the seasonal pattern of ground water elevation fluctuations at the mine site correlate well with the variations exhibited in the four offsite background wells.

The data and graphs show that ground water elevations at onsite interior monitor wells MW-13, MW-17 and MW-27 are influenced primarily by surface water levels in Quarry B-1 and West Quarry I. In the latter portion of 2007, ground water elevations in the three wells dropped rapidly,

in response to the initiation of dewatering in Quarry B-1 and lowered water levels in West Quarry I. During 2009, water levels in Quarry B-1, West Quarry I and wells MW-13, MW-17 and MW-27 all remained fairly stable. As shown on Graphs A-1 and B-1, water levels in well MW-13 are more heavily influenced by dewatering in Quarry B-1, while ground water elevations in wells MW-17 and 27 correspond more closely to surface water elevations in West Quarry I. Water levels in the four interior monitor wells south and west of Quarry B-1 (MW-69 through MW-72) remained fairly stable throughout 2009. As anticipated, ground water elevations were lower in the two wells located directly to the south of the new quarry (MW-69 and MW-70).

The water level in Quarry B-1 is measured at staff gage SG-90. During 2009, surface water elevations in Quarry B-1 ranged between approximately 34.1 to 35.3 feet NGVD29. The minimum permitted surface water elevation in the active quarry is 25 feet NGVD29. Water levels gradually declined in the three inactive quarries east of the plant service road (the North, South and East Quarries) from January through the beginning of May, showed a more rapid increase in elevations through the beginning of September, then gradually declined for the remainder of the year. Surface water elevation data is summarized in **Table 3**, and on Graphs B-1 and B-2, included in **Appendix B**.

3.1.3 Potentiometric Surface Analysis

As outlined in the WUP and the accompanying EMMP, drawdown in the 12 onsite property boundary monitor wells (discussed in Section 3.1.2), is to be determined by a direct comparison of ground water elevations in the four offsite background monitor wells versus the concurrent ground water elevations in the 12 onsite wells.

The interpolated ground water elevations for the mine site are based on a projection of the actual ground water elevations measured in the four background wells. The methodology for conducting the potentiometric surface analyses utilizes a modification of the standard three-point problem technique. The locations of the four background wells and the onsite wells are plotted on a drawing, and the points representing the background wells are connected with straight lines. The potentiometric surface elevations along each line are then calculated using linear interpolation between the two end points of each line. The interpolated elevations along each line are connected to form a potentiometric surface elevation contour map covering the Center Hill Mine site. Ground water elevations measured in the 12 onsite monitor wells are then compared to the interpolated potentiometric surface elevations to calculate drawdown (or mounding).

The potentiometric surface elevation contour maps were prepared using ground water elevation data obtained during each end-of month monitoring event. **Table 6** summarizes the results of the monthly drawdown/mounding analyses completed for 2009, and an accompanying graph is included in **Appendix G**.

As shown in the table, all of the monthly potentiometric surface analyses showed interpolated drawdowns in the three eastern property boundary wells (MW-19 through MW-21). During 2009, calculated average drawdowns at the three well locations ranged between 1.9 feet (in well MW-21) and 3.3 feet (in well MW-20), and the average drawdown for all three well locations was 2.8 feet.

3.2 Assessment of Hydraulic Barrier Ditch Effectiveness

The effectiveness of the Hydraulic Barrier Ditch in minimizing the propagation of ground water drawdown and providing recharge to the Floridan aquifer was assessed by:

- 1) evaluating ground water and surface water elevation data collected at the mine sit; and,
- 2) comparing the quantities of water pumped from West Quarry II with the quantities of water routed to West Quarry II via the HBD.

3.2.1 Evaluation of 2009 Ground Water and Surface Water Elevation Data

As previously discussed in Section 3.1.2, the 2009 ground water elevation data for the 12 property boundary monitor wells shows that water levels followed a pattern of seasonal fluctuation that correlate well with variations in the ground water elevations of the four offsite background wells, while water levels in the quarries and several of the interior well were influenced more heavily by the effects of dewatering and surface water routing. When compared with water levels at the beginning of the year, ground water elevations at all of the 12 property boundary wells were higher, with differences ranging between +0.64 feet (at well MW-68) and +2.23 (at well MW-19). Additionally, it should be noted that ground water elevations obtained from nine of the 12 property boundary wells (wells MW-19 through MW-21 being the exceptions) were consistently higher than the interpolated (expected) ground water elevations generated during the potentiometric surface analyses.

A review of the 2009 data shows that water levels in Quarry B-1 were maintained at elevations ranging between approximately 34 to 35 feet NGVD29, or roughly 45 feet below the prevailing ground water elevations. The lowering of surface water levels in Quarry B-1 was offset by maintaining higher surface water elevations in West Quarry I, West Quarry II and the HBD. During 2009, surface water elevations in West Quarry I and West Quarry II were maintained at levels ranging from approximately 80 to 84 feet, while in the Hydraulic Barrier Ditch, surface water elevations were maintained between 82 and 83 feet. In the North, South and East Quarries, surface water elevations fluctuated between approximately 71 and 78 feet.

3.2.2 Quarry B-1 Pumpage and Floridan Aquifer Recharge

As discussed in Section 2.2.3, surface water withdrawn from Quarry B-1 is pumped to West Quarry II via the HBD. During 2009, the weekly pumpage volume for Quarry B-1 ranged between approximately 80 and 175 million gallons per week, with a total pumpage volume of approximately 6,108,500,000 gallons. Not accounting for surface evaporation that occurs during conveyance between the active mine pit and West Quarry II, all of the surface water pumpage withdrawn from Quarry B-1 is retained onsite and is returned to the Floridan aquifer via infiltration in the HBD or the inactive quarries onsite (West Quarry II, West Quarry I and the South, East, and North Quarries).

4.0 SINKHOLE MONITORING SURVEY

4.1 Introduction

Special Condition 5.F. of the WUP requires the submittal of annual sinkhole monitoring surveys. As outlined in the permit and the accompanying EMMP, each sinkhole monitoring survey will be conducted using the following methodologies:

- 1) Cemex will prepare an aerial photograph covering the area of concern. The aerial photograph will be examined to identify potential sinkholes and/or sinkhole development.
- 2) The most recent Florida Geological Survey (FGS) sinkhole database will be reviewed to identify recent sinkholes reported to the agency.
- 3) The use of aerial photographs to identify potential subsidence features requires ground truthing. The ground truthing of these features will be conducted by walking the property, if access is available.
- 4) Contiguous land owners will be contacted to identify relict and new sinkhole-related features. If a new feature is identified, permission will be sought to access the property for inspection and documentation.

The sinkhole survey is to be conducted using a baseline defined by karst features shown on the Bushnell (1958) and Center Hill (1969) USGS 7.5-minute topographic quadrangles. Sinkholes, or indications of potential sinkholes, identified in the FGS database, on the most recent aerial photograph, and/or during area reconnaissance surveys, will be compared to karst features and subsidence features shown on the referenced topographic maps. New and further developed sinkholes will be mapped, and the information will be submitted to the District as part of the annual water level analyses.

4.2 Sinkhole Monitoring Methodology

4.2.1 Aerial Photograph Review

In September 2009, an aerial photograph of the Center Hill Mine and the surrounding vicinity was prepared by TechMap, Inc. A digital copy of the aerial photograph was used as the base map for Figure 1 included in this report. An examination of the aerial photograph focused on a search for circular depressions in the landscape surrounding the mine site. No new sinkholes or indications of sinkhole development were evident on the September 2009 aerial photograph.

4.2.2 Ground Truthing Reconnaissance

Depressions in the landscape store little or no surface water during extended shortages of rainfall, and these conditions may limit the use of aerial photographs in effectively identifying surface depressional features. As a result, ground truthing was conducted in the vicinity of the Center Hill Mine on January 19, 2009. During this reconnaissance, no new potential subsidence features were identified.

4.2.3 FGS Sinkhole Database Review

The Florida Geological Survey (FGS) maintains a database of sinkholes reported to the State of Florida by private entities and public agencies. The most recent update to the database, completed in April 2007, contains over 2,800 sinkholes that have been reported since 1909. A review of the most recent database update revealed that no sinkholes have been reported in Township 21 South, Range 23 East, the 36-square mile area in which the Center Hill Mine is located.

4.2.4 Contiguous Landowner Contacts

On February 23, 2009, letters with attached questionnaires were sent by mail to 49 landowners with properties adjoining the boundaries of the Center Hill Mine. Landowner were requested to indicate whether they had knowledge or observations of sinkholes, surface depressions or sunken ground on their property, and to respond by March 6, 2009. As a result of this request, TCG received one affirmative response from Mr. Danny Cowart. Mr. Cowart owns a cattle ranch adjoining the northwest corner of the mine property.

4.2.5 Sinkhole Monitoring Survey Inspection

On April 2, 2009, TCG personnel conducted an inspection and interview at the Cowart property with the ranch foreman. As described below, two locations were inspected, and photographs were taken at each location.

Cowart Area #1 28° 39.910' N Latitude 82° 1.887' W Longitude

Area #1 is a sinkhole located in a pasture approximately 500 feet northwest of the cow pens. According to the ranch foreman, the sinkhole was first observed in November 2008. Initially, the sinkhole had a depth of approximately eight feet below ground surface (bgs), and a diameter of approximately four feet. Ranch employees filled in the hole with hay and placed a feeding station over the feature to prevent injuries to the cattle, and additional hay was added to the hole over the past several months. A photograph of the location is provided in **Appendix H**.

Cowart Area #2 28° 39.516' N Latitude 82° 1.627' W Longitude

Area #2 is a grouping of four surface depressions located in a pasture approximately 1/4-mile west of the visual berm that parallels the hydraulic barrier ditch near the northwest corner of the mine property. The ranch foreman reported that all four of the features have been present on the property for at least 10 years, and that none of the features appeared to have grown larger in size. The two northernmost depressions are approximately six and eight feet in diameter. The larger hole has a depth of approximately four feet bgs, with standing water at a depth of approximately three feet bgs. The two southernmost depressions are approximately six and 12 feet in diameter. The larger hole also has a depth of approximately four feet bgs, with standing water at a depth of approximately three feet bgs. Photographs of the two locations are provided in **Appendix H**.

On January 19, 2010, letters with attached questionnaires were sent by mail to the 50 landowners with properties adjoining the boundaries of the mine site. Each landowner was requested to respond by February 1, 2010. If a landowner identifies a new or developing sinkhole or subsidence-related feature, permission will be sought to access the property for an inspection and documentation. The results of any inspections will be incorporated into the next annual water level analysis. A list of current contiguous landowners and a blank copy of the sinkhole questionnaire form are provided in **Appendix H**.

4.3 Findings

The 2009 sinkhole monitoring survey for the Center Hill Mine indicated that one apparently recent sinkhole-related feature was identified on the Cowart Ranch adjoining the northwest corner of the mine property (Cowart Area #1). The feature was first observed in November 2008. Cemex will continue to monitor the feature during subsequent sinkhole monitoring surveys, and will report any further developments at the site, if necessary. Because ground water elevations in the northwest corner of the Center Hill Mine property are at or above ambient ground water elevations, the karst feature observed on Mr. Cowart's property is not expected to be the result of mining. No other offsite sinkholes resulting from mine dewatering were reported or observed during 2009.

5.0 SUMMARY AND CONCLUSIONS

The conclusions resulting from the 2009 Annual Water Level Analysis for the Cemex Center Hill Mine are as follows:

- 1) The regional (Sumter County) average annual rainfall for 2009 was 51.2 inches, an increase of 3.8 inches over the previous year, but still slightly below the long-term average annual rainfall of 52.1 inches. During this same period, the average annual ground water elevation in the SWFWMD Webster well decreased to approximately 79.4 feet NGVD29, a drop of 1.2 feet from the 2008 average elevation. Although ground water levels in the Webster well typically exhibit a strong correlation with regional rainfall amounts, a review of the data shown in Graph E-1 shows that similar anomalies have occurred on at least three occasions since 1978 (1984-85, 1996-97 and 2006-2007).
- 2) In general, ground water levels gradually decreased at the 12 onsite property boundary monitor wells between January and mid-May, increased more rapidly through the beginning of September, then gradually decreased through the end of the year. Based on these data, seasonal fluctuations in ground water elevations at the mine site correlate well with the patterns of variation exhibited in the four offsite background wells. When compared with water levels at the beginning of the year, ground water elevations at all of the property boundary wells were higher, with differences ranging between +0.64 feet (at well MW-68) and +2.23 (at well MW-19). Additionally, it should be noted that ground water elevations obtained from nine of the 12 property boundary wells (wells MW-19 through MW-21 being the exceptions) were consistently higher than the interpolated (expected) ground water elevations generated during the potentiometric surface analyses.
- 3) The data and graphs show that ground water elevations at onsite interior monitor wells MW-13, MW-17 and MW-27 are influenced primarily by surface water levels in Quarry B-1 and West Quarry I. As shown on Graphs A-1 and B-1, water levels in well MW-13 are more heavily influenced by dewatering in Quarry B-1, while ground water elevations in wells MW-17 and 27 correspond more closely to surface water elevations in West Quarry I.
- 4) The monthly potentiometric surface analyses showed interpolated drawdowns in the eastern property boundary wells (MW-19 through MW-21). During 2009, calculated average drawdowns at the three well locations ranged between 1.9 feet (in well MW-21) and 3.3 feet (in well MW-20), and the average drawdown for all three well locations was 2.8 feet. In 2008, the average drawdown value for the three wells was 4.7 feet. The reduction in drawdown is the result of water movement from West Quarry I into the South and East Quarries.
- 5) Surface water levels in Quarry B-1 were maintained at elevations ranging between approximately 34 to 35 feet NGVD 29, or roughly 45 feet below the prevailing ground water elevations. The lowering of surface water levels in Quarry B-1 was offset by

maintaining higher surface water elevations in West Quarry I, West Quarry II and the HBD. During 2009, surface water elevations in West Quarry I and West Quarry II were maintained at levels ranging from approximately 80 to 84 feet, while in the Hydraulic Barrier Ditch, surface water elevations were maintained between 82 and 83 feet. In the North, South and East Quarries, surface water elevations fluctuated between approximately 71 and 78 feet.

- 6) During 2009, the weekly pumpage volume for Quarry B-1 ranged between approximately 80 and 175 million gallons per week, with a total pumpage volume of approximately 6,108,500,000 gallons. Not accounting for surface evaporation that occurs during conveyance between the active mine pit and West Quarry II, all of the surface water pumpage withdrawn from Quarry B-1 is retained onsite and is returned to the Floridan aquifer via infiltration in the HBD or the inactive quarries onsite (West Quarry II, West Quarry I and the South, East, and North Quarries). There have been no discharges from Outfall D-001 during 2009.
- 7) The 2009 sinkhole monitoring survey for the Center Hill Mine indicated that one apparently recent sinkhole-related feature was identified on the Cowart Ranch adjoining the northwest corner of the mine property (Cowart Area #1). Cemex will continue to monitor the feature during subsequent sinkhole monitoring surveys, and will report any further developments at the site, if necessary. Because ground water elevations in the northwest corner of the Center Hill Mine property are at or above ambient ground water elevations, the karst feature observed on Mr. Cowart's property is not expected to be the result of mining. No other offsite sinkholes resulting from mine dewatering were reported or observed during 2009.

Based on these findings, the Hydraulic Barrier Ditch is providing an effective means of minimizing the propagation of ground water drawdown and providing recharge to the Floridan aquifer in the vicinity of the Center Hill Mine. The next annual water level analysis will cover the period from January through December 2010 and will be submitted in 2011.

PROFESSIONAL ENGINEER CERTIFICATION

2009 Annual Water Level Analysis

Cemex Construction Materials Florida, LLC

Center Hill Mine

January 28, 2010

I, Mark R. Stephens, PE#36179, certify that I currently hold an active license in the State of Florida, and am competent through education or experience to provide engineering services in the civil engineering discipline contained in the report. I further certify that this report was prepared by me or under my responsible charge as defined in Chapter 61G15-18.001, F.A.C. Moreover, if offered by a corporation, partnership, or through a fictitious name, I certify that the company offering the engineering services, The Colinas Group, Inc., holds an active certificate of authorization (No. 7934) to provide engineering services.

 Date: 1-27-10

Mark R. Stephens, P.E., P.E.

Florida P.E. License No. 36179

Engineering Business No. EB-0007934

The Colinas Group, Inc.

2031 East Edgewood Drive, Suite 5

Lakeland, Florida 33803-3659

Phone (863) 669-9141

TABLES

TABLE 1
HYDROLOGIC MONITORING PLAN
UPDATED JANUARY 2010
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC - CENTER HILL MINE

Monitoring Station Type	Cemex Station ID	District ID No.	Location	Well Casing Diameter (inches)	Measuring Point Elevation (feet NGVD29)	Well Cased Depth (feet bgs)	Well Total Depth (feet bgs)	Monitoring/Reporting Frequency	Monitoring Parameter
Onsite Ground Water Monitor Wells and Piezometers	MW-13	13	Southeast corner of West Quarry I	2	97.65	20' solid/110' screen	93.0	Weekly / Monthly	Water Level
	MW-17	17	South of West Quarry I, east of MW-27	2	92.76	20' solid/110' screen	135.0	Weekly / Monthly	Water Level
	MW-19	19	East of East Quarry	6	95.66	Unknown	74.6	Weekly / Monthly	Water Level
	MW-20	20	SE corner of East Quarry	6	93.50	Unknown	123.4	Weekly / Monthly	Water Level
	MW-21	21	SE corner of property, west of Jumper Creek	6	90.37	Unknown	121.7	Weekly / Monthly	Water Level
	MW-27	27	Southwest corner of West Quarry I	6	98.48	55	169.6	Weekly / Monthly	Water Level
	MW-50	50	West of west property line, SW of MW-66	2	88.93	20' solid/130' screen	143.4	Weekly / Monthly	Water Level
	MW-51	51	South property line west of MW-67	2	98.53	20' solid/130' screen	155.5	Weekly / Monthly	Water Level
	MW-55	55	West of West Quarry II, east of MW-50	4	100.55	40	163.0	Weekly / Monthly	Water Level
	PZ-56	56	Wetland C-1, north of West Quarry II	2	88.00	3	8.6	Weekly / Monthly	Water Level
	PZ-58	58	Wetland C-2, northwest of West Quarry II	2	89.97	3	5.5	Weekly / Monthly	Water Level
	MW-60	60	West property line, north of MW-61	4	90.53	38	76.2	Weekly / Monthly	Water Level
	MW-61	61	Southwest corner of property	4	89.59	40	79.0	Weekly / Monthly	Water Level
	MW-64	64	Northwest corner of property	4	96.18	40	102.6	Weekly / Monthly	Water Level
	MW-66	66	West property line, NE of MW 50, W of MW-55	4	98.09	40	79.2	Weekly / Monthly	Water Level
	MW-67	67	South property line, west of mine entrance	4	91.29	40	78.4	Weekly / Monthly	Water Level
	MW-68	68	South property line, east of MW-61	4	90.87	40	74.0	Weekly / Monthly	Water Level
	MW-69	69	South of Quarry B-1, north of MW-70	4	98.20	20	106.5	Weekly / Monthly	Water Level
MW-70	70	North of MW-67, south of MW-69	4	93.02	20	95.4	Weekly / Monthly	Water Level	
MW-71	71	South of Quarry B-1, north of MW-72	4	90.71	20	106.8	Weekly / Monthly	Water Level	
MW-72	72	North of MW-68, south of MW-71	4	90.32	20	107.2	Weekly / Monthly	Water Level	
Offsite Wetland Piezometers	PZ-OS1*	74	Simmons Property, west of MW-60	2	89.48	2' solid/20' screen	22.0	Weekly / Monthly	Water Level
	PZ-OS2	75	Stevenson Property, south of C.R. 48	2	91.60	2' solid/20' screen	22.0	Weekly / Monthly	Water Level
Offsite Background Ground Water Monitor Wells	BG-1	86	Stuart Ranch (northeast of mine)	6	102.59	N/A	205.9	Weekly / Monthly	Water Level
	BG-2	87	City of Webster (southwest of mine)	N/A	N/A	N/A	N/A	Weekly / Monthly	Water Level
	BG-3	88	Cowart Ranch (northwest of mine)	6	90.08	N/A	>300.0	Weekly / Monthly	Water Level
	BG-4	N/A	Menaleous Ranch (southeast of mine)	6	99.25	N/A	58.5	Weekly / Monthly	Water Level
Staff Gages	SG-1	1	Southwest corner of South Quarry	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-11	11	North Quarry at Outfall D-001	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-18	18	Jumper Creek at NW corner of property	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-22	22	Southeast corner of East Quarry	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-28	28	Southeast corner of property, W of Jumper Creek	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-57	57	Wetland C-1, north of West Quarry II	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-59	59	Wetland C-2, northwest of West Quarry II	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-24	62	Northeast corner of West Quarry I	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-29	63	East side of West Quarry II	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-65	65	HBD-1 outfall at west end of West Quarry I	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-73	73	HBD-2, west of MW-55	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
	SG-OS1*	76	Simmons Property, west of MW-60	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level
SG-OS2	77	Stevenson Property, south of C.R. 48	N/A	Direct Reading	N/A	N/A	Weekly / Monthly	Water Level	
Flow/Discharge	D-001	78	North Quarry outfall to Jumper Creek	N/A	N/A	N/A	N/A	Continuous / Monthly	Gravity Discharge
	JC-East	79	Jumper Creek east of East Quarry	N/A	N/A	N/A	N/A	Weekly / Monthly	Gravity Flow
	JC-North	80	Jumper Creek upstream of Outfall D-001	N/A	N/A	N/A	N/A	Weekly / Monthly	Gravity Flow
	JC-West	81	Jumper Creek near NW corner of property	N/A	N/A	N/A	N/A	Weekly / Monthly	Gravity Flow
	HBD-2	84	Southeast corner of Quarry B-1	N/A	N/A	N/A	N/A	Continuous / Monthly	Pumped Discharge
Rainfall	RG-1	85	North Quarry at Outfall D-001	N/A	N/A	N/A	N/A	Continuous / Monthly	Rainfall

- Notes:
- 1) feet NGVD29 = elevation in feet, referenced to National Geodetic Vertical Datum of 1929
 - 2) feet bgs = feet below ground surface
 - 3) N/A = not available
 - 4) * = monitoring station removed from service

TABLE 3
2009 SURFACE WATER ELEVATION DATA SUMMARY
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC - CENTER HILL MINE

Date	CEMEX MONITORING POINT IDENTIFICATION, LOCATION, DISTRICT IDENTIFICATION NUMBER AND REFERENCE POINT ELEVATION (IN FEET NGVD29)													
	GROUND WATER ELEVATIONS (IN FEET NGVD29)													
	SG-1 (S end of South Quarry)	SG-11 (N end of North Quarry, S of D001 Outfall)	SG-18 (Jumper Creek at NW corner of property)	SG-22 (SE corner of East Quarry)	SG-28 (Jumper Creek at SE corner of property)	SG-57 (Wetland C-1, N of West Quarry II)	SG-24 (E end of West Quarry I)	SG-29 (E side of West Quarry II)	SG-73A (HBD #2 at outfall to West Quarry II)	SG-OS2 (Wetland OS2 at Stevenson property S of mine)	JC East (Jumper Creek near SE corner of East Quarry)	JC North (Jumper Creek upstream of Outfall D001)	JC North 2 (Jumper Creek downstream of Outfall D001)	SG-90 (SE corner of Quarry B-1)
1 DR	11 DR	18 DR	22 DR	28 DR	57 DR	62 DR	63 DR	73 DR	77 DR	79 DR	80 DR	N/A DR	N/A DR	
01/07/09	73.40	73.70	Dry	73.60	Dry	81.70	82.50	81.90	82.30	Dry	Dry	Dry	Dry	34.40
01/14/09	73.30	73.50	80.40	73.40	Dry	80.80	82.40	81.80	82.30	Dry	Dry	Dry	Dry	34.70
01/21/09	73.20	73.40	80.20	73.30	Dry	80.60	82.00	81.70	82.50	Dry	Dry	Dry	Dry	34.40
01/28/09	73.00	73.30	80.20	73.10	Dry	80.60	82.20	81.60	82.00	Dry	Dry	Dry	Dry	34.50
02/04/09	72.90	73.30	80.20	73.00	Dry	80.60	82.20	81.60	82.10	Dry	Dry	Dry	Dry	34.30
02/11/09	72.80	73.20	80.20	72.90	Dry	80.60	82.20	81.60	82.20	Dry	Dry	Dry	Dry	34.30
02/19/09	72.60	73.10	80.20	72.80	Dry	80.50	82.30	81.70	82.00	Dry	Dry	Dry	Dry	34.60
02/25/09	72.40	72.80	80.20	72.60	Dry	80.20	82.20	81.70	82.20	Dry	Dry	Dry	Dry	34.60
03/04/09	72.20	72.80	80.20	72.40	Dry	80.20	82.10	81.70	82.10	Dry	Dry	Dry	Dry	34.50
03/11/09	72.20	72.60	80.20	72.40	Dry	Dry	82.20	81.60	81.90	Dry	Dry	Dry	Dry	34.80
03/18/09	72.10	72.40	80.00	72.20	Dry	Dry	82.10	81.40	81.80	Dry	Dry	Dry	Dry	34.70
03/25/09	71.90	72.60	80.20	72.00	Dry	Dry	82.00	81.50	81.90	Dry	Dry	Dry	Dry	34.20
04/01/09	71.90	72.40	80.20	72.00	Dry	Dry	81.90	81.40	83.00	Dry	Dry	Dry	Dry	34.50
04/08/09	71.80	72.20	80.20	71.90	Dry	Dry	81.50	81.50	82.20	Dry	Dry	Dry	Dry	34.40
04/15/09	71.80	72.20	80.20	71.80	Dry	Dry	81.50	81.50	82.30	Dry	Dry	Dry	Dry	34.30
04/22/09	71.80	72.10	80.20	71.90	Dry	Dry	81.50	81.50	82.10	Dry	Dry	Dry	Dry	34.30
04/29/09	71.50	71.90	80.20	71.70	Dry	Dry	80.70	81.20	82.20	Dry	Dry	Dry	Dry	34.10
05/06/09	71.30	71.80	80.20	71.50	Dry	Dry	80.40	81.40	82.00	Dry	Dry	Dry	Dry	NR
05/13/09	71.10	71.60	80.20	71.30	Dry	Dry	80.80	81.30	82.00	Dry	Dry	Dry	Dry	34.60
05/21/09	71.80	72.10	80.30	71.80	Dry	81.80	81.70	81.70	82.60	Dry	Dry	Dry	Dry	34.60
05/27/09	71.90	72.70	80.02	72.50	Dry	80.90	83.30	81.90	82.70	83.90	Dry	Dry	Dry	34.60
06/03/09	72.40	72.70	80.10	72.60	Dry	Dry	83.60	82.00	82.70	Dry	Dry	Dry	Dry	34.50
06/12/09	72.90	73.00	80.30	73.10	Dry	Dry	83.60	82.10	82.50	Dry	Dry	Dry	Dry	34.80
06/17/09	73.10	73.10	80.20	73.30	Dry	80.90	83.60	82.10	82.50	Dry	Dry	Dry	Dry	34.50
06/23/09	73.30	73.40	80.20	73.40	Dry	80.90	83.60	82.10	82.60	Dry	Dry	Dry	Dry	34.50
07/01/09	73.70	73.80	80.20	73.70	Dry	81.10	83.80	82.20	83.40	83.50	Dry	Dry	Dry	35.10
07/08/09	73.90	74.20	80.10	74.10	Dry	Dry	83.90	82.50	82.80	Dry	Dry	Dry	Dry	35.30
07/15/09	74.90	74.70	80.10	75.00	Dry	81.10	84.30	82.50	83.00	84.00	Dry	Dry	Dry	34.80
07/22/09	75.10	75.40	80.30	75.40	Dry	81.10	84.20	82.50	83.00	Dry	Dry	Dry	Dry	35.30
07/29/09	75.80	75.80	80.30	75.90	Dry	81.10	83.50	84.20	82.90	83.60	Dry	Dry	Dry	34.10
08/05/09	76.20	75.20	80.30	76.30	Dry	81.10	84.10	82.50	82.90	83.50	Dry	Dry	Dry	34.60
08/12/09	76.30	75.40	80.30	76.40	Dry	81.10	82.30	82.50	82.90	Dry	Dry	Dry	Dry	34.30
08/19/09	76.70	76.60	80.30	76.60	Dry	81.10	82.40	82.50	82.90	83.40	Dry	Dry	Dry	34.70
08/26/09	76.80	76.80	80.30	77.00	Dry	81.10	82.50	82.60	82.90	83.40	Dry	Dry	Dry	34.40
09/02/09	77.50	77.50	80.30	77.60	Dry	81.20	82.50	82.60	83.30	83.60	Dry	Dry	Dry	34.30
09/09/09	78.10	78.00	80.30	78.10	Dry	81.20	82.60	82.60	83.20	83.90	Dry	Dry	Dry	34.40
09/16/09	78.20	78.30	80.30	78.20	Dry	81.20	82.60	82.60	83.00	83.80	Dry	Dry	Dry	34.80
09/23/09	77.90	78.10	80.30	78.20	Dry	81.20	82.60	82.60	83.20	83.60	Dry	Dry	Dry	34.30
09/30/09	77.80	78.20	80.30	78.10	Dry	81.30	82.60	82.60	82.90	Dry	Dry	Dry	Dry	34.30
10/07/09	77.50	77.90	80.40	77.80	Dry	81.10	82.50	82.50	83.10	Dry	Dry	Dry	Dry	34.20
10/14/09	77.20	77.70	80.20	77.60	Dry	81.10	82.60	82.60	83.00	Dry	Dry	Dry	Dry	34.20
10/21/09	77.00	77.50	80.40	77.30	Dry	81.10	82.40	82.50	82.90	Dry	Dry	Dry	Dry	34.40
10/28/09	76.70	77.20	80.30	77.00	Dry	81.10	82.50	82.50	83.00	Dry	Dry	Dry	Dry	34.40
11/04/09	76.40	77.00	80.30	76.80	Dry	81.10	82.30	82.50	82.90	Dry	Dry	Dry	Dry	34.20
11/11/09	76.00	76.80	80.30	76.40	Dry	81.20	82.20	82.40	82.80	Dry	Dry	Dry	Dry	34.70
11/18/09	75.70	76.30	80.30	76.00	Dry	81.00	82.20	82.30	82.80	Dry	Dry	Dry	Dry	34.20
11/25/09	75.50	76.10	80.30	75.80	Dry	81.00	82.30	82.30	82.50	82.60	Dry	Dry	Dry	34.20
12/02/09	75.20	75.80	80.30	75.50	Dry	81.00	82.30	82.40	82.80	Dry	Dry	Dry	Dry	34.50
12/09/09	75.40	75.90	80.30	75.70	Dry	81.10	82.50	82.60	83.00	Dry	Dry	Dry	Dry	34.40
12/16/09	75.30	75.80	80.30	75.60	Dry	81.10	82.50	82.50	82.90	Dry	Dry	Dry	Dry	34.30
12/23/09	75.20	75.60	80.30	75.50	Dry	81.10	82.30	82.50	82.80	Dry	Dry	Dry	Dry	34.70
12/29/09	75.20	75.60	80.30	75.10	Dry	81.10	82.30	82.50	82.70	Dry	Dry	Dry	Dry	34.40

Notes: 1) NGVD29 = National Geodetic Vertical Datum of 1929
2) N/A = not available/not applicable
3) DR = direct reading, referenced to NGVD29
4) NR = no reading
5) SG-OS1 (DID #76) removed from service at request of landowner in May 2007

TABLE 4
 2009 QUARRY B-1 SURFACE WATER PUMPAGE SUMMARY
 CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC - CENTER HILL MINE

Date	Quarry B-1 Pumpage Data						Weekly Total Pumpage Volume (MGD)
	Pump QB-1			Pump QB-2			
	Hour Meter Reading	Hours of Operation	Weekly Pumpage Volume (MGD)	Hour Meter Reading	Hours of Operation	Weekly Pumpage Volume (MGD)	
01/07/09	14,355.0	0.0	0.0	3,012.4	91.4	119.3	119.3
01/14/09	14,355.0	0.0	0.0	3,094.3	81.9	106.9	106.9
01/21/09	14,374.6	19.6	10.9	3,220.3	126.0	164.4	175.3
01/28/09	14,374.6	0.0	0.0	3,301.3	81.0	105.7	105.7
02/04/09	14,374.6	0.0	0.0	3,384.7	83.4	108.8	108.8
02/11/09	14,374.6	0.0	0.0	3,464.2	79.5	103.7	103.7
02/19/09	14,374.6	0.0	0.0	3,564.4	100.2	130.8	130.8
02/25/09	14,374.6	0.0	0.0	3,638.8	74.4	97.1	97.1
03/04/09	14,374.6	0.0	0.0	3,721.7	82.9	108.2	108.2
03/11/09	14,374.6	0.0	0.0	3,805.9	84.2	109.9	109.9
03/18/09	14,374.6	0.0	0.0	3,889.4	83.5	109.0	109.0
03/25/09	14,374.6	0.0	0.0	3,974.6	85.2	111.2	111.2
04/01/09	14,374.6	0.0	0.0	4,056.6	82.0	107.0	107.0
04/08/09	14,374.6	0.0	0.0	4,136.5	79.9	104.3	104.3
04/15/09	14,374.6	0.0	0.0	4,219.7	83.2	108.6	108.6
04/22/09	14,374.6	0.0	0.0	4,302.3	82.6	107.8	107.8
04/29/09	14,374.6	0.0	0.0	4,382.2	79.9	104.3	104.3
05/06/09	14,374.6	0.0	0.0	4,460.0	77.8	101.5	101.5
05/13/09	14,374.6	0.0	0.0	4,549.0	89.0	116.1	116.1
05/21/09	14,374.6	0.0	0.0	4,638.8	89.8	117.2	117.2
05/27/09	14,374.6	0.0	0.0	4,714.2	75.4	98.4	98.4
06/03/09	14,374.6	0.0	0.0	4,801.7	87.5	114.2	114.2
06/12/09	14,374.6	0.0	0.0	4,912.3	110.6	144.3	144.3
06/17/09	14,374.6	0.0	0.0	4,973.7	61.4	80.1	80.1
06/23/09	14,374.6	0.0	0.0	5,062.6	88.9	116.0	116.0
07/01/09	14,374.6	0.0	0.0	5,174.8	112.2	146.4	146.4
07/08/09	14,374.6	0.0	0.0	5,268.5	93.7	122.3	122.3
07/15/09	14,374.6	0.0	0.0	5,348.4	79.9	104.3	104.3
07/22/09	14,374.6	0.0	0.0	5,456.3	107.9	140.8	140.8
07/29/09	14,374.6	0.0	0.0	5,549.0	92.7	121.0	121.0
08/05/09	14,374.6	0.0	0.0	5,642.5	93.5	122.0	122.0
08/12/09	14,374.8	0.2	0.1	5,736.2	95.7	124.9	125.0
08/19/09	14,374.8	0.0	0.0	5,833.0	94.8	123.7	123.7
08/26/09	14,374.8	0.0	0.0	5,931.8	98.8	128.9	128.9
09/02/09	14,374.8	0.0	0.0	6,027.3	95.5	124.6	124.6
09/09/09	14,374.8	0.0	0.0	6,126.3	99.0	129.2	129.2
09/16/09	14,374.8	0.0	0.0	6,218.5	92.2	120.3	120.3
09/23/09	14,374.8	0.0	0.0	6,312.4	93.9	122.5	122.5
09/30/09	14,374.8	0.0	0.0	6,411.1	98.7	128.8	128.8
10/07/09	14,374.8	0.0	0.0	6,504.9	93.8	122.4	122.4
10/14/09	14,374.8	0.0	0.0	6,598.5	93.6	122.1	122.1
10/21/09	14,374.8	0.0	0.0	6,693.0	94.5	123.3	123.3
10/28/09	14,374.8	0.0	0.0	6,787.4	94.4	123.2	123.2
11/04/09	14,374.8	0.0	0.0	6,879.3	91.9	119.9	119.9
11/11/09	14,374.8	0.0	0.0	6,969.2	89.9	117.3	117.3
11/18/09	14,374.8	0.0	0.0	7,059.5	90.3	117.8	117.8
11/25/09	14,374.8	0.0	0.0	7,139.0	79.5	103.7	103.7
12/02/09	14,374.8	0.0	0.0	7,240.6	101.6	132.6	132.6
12/09/09	14,374.8	0.0	0.0	7,345.9	105.3	137.4	137.4
12/16/09	14,374.8	0.0	0.0	7,423.6	77.7	101.4	101.4
12/23/09	14,374.8	0.0	0.0	7,512.8	89.2	116.4	116.4
12/29/09	14,374.8	0.0	0.0	7,593.7	80.9	105.6	105.6
TOTALS	N/A	19.8	11.0	N/A	4,672.7	6,097.5	6,108.5

Notes: 1) MGD = million gallons per day
 2) N/A = not available/not applicable

-LE 5
2009 RAINFALL DATA SUMMARY
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC - CENTER HILL MINE

January 2009		February 2009		March 2009		April 2009		May 2009		June 2009		July 2009		August 2009		September 2009		October 2009		November 2009		December 2009			
Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)	Date	Rain (in.)		
01/01/09	0.00	02/01/09	0.00	03/01/09	0.00	04/01/09	0.00	05/01/09	0.00	06/01/09	0.00	07/01/09	0.20	08/01/09	0.00	09/01/09	0.06	10/01/09	0.00	11/01/09	0.00	12/01/09	0.00		
01/02/09	0.00	02/02/09	0.08	03/02/09	0.01	04/02/09	0.01	05/02/09	0.01	06/02/09	0.00	07/02/09	0.00	08/02/09	0.06	09/02/09	0.87	10/02/09	0.00	11/02/09	0.00	12/02/09	0.45		
01/03/09	0.00	02/03/09	0.00	03/03/09	0.00	04/03/09	0.00	05/03/09	0.00	06/03/09	0.45	07/03/09	0.00	08/03/09	0.00	09/03/09	0.04	10/03/09	0.00	11/03/09	0.00	12/03/09	0.07		
01/04/09	0.00	02/04/09	0.02	03/04/09	0.00	04/04/09	0.00	05/04/09	0.00	06/04/09	0.02	07/04/09	0.00	08/04/09	0.01	09/04/09	0.00	10/04/09	0.00	11/04/09	0.00	12/04/09	1.89		
01/05/09	0.00	02/05/09	0.00	03/05/09	0.00	04/05/09	0.01	05/05/09	0.01	06/05/09	0.00	07/05/09	0.00	08/05/09	0.06	09/05/09	0.01	10/05/09	0.00	11/05/09	0.00	12/05/09	0.52		
01/06/09	0.00	02/06/09	0.00	03/06/09	0.00	04/06/09	0.00	05/06/09	0.04	06/06/09	0.04	07/06/09	0.08	08/06/09	0.00	09/06/09	0.07	10/06/09	0.01	11/06/09	0.00	12/06/09	0.00		
01/07/09	0.00	02/07/09	0.00	03/07/09	0.00	04/07/09	0.00	05/07/09	0.11	06/07/09	0.11	07/07/09	0.56	08/07/09	0.26	09/07/09	0.00	10/07/09	0.00	11/07/09	0.00	12/07/09	0.08		
01/08/09	0.00	02/08/09	0.00	03/08/09	0.00	04/08/09	0.00	05/08/09	0.71	06/08/09	0.71	07/08/09	2.19	08/08/09	0.00	09/08/09	0.00	10/08/09	0.00	11/08/09	0.00	12/08/09	0.00		
01/09/09	0.00	02/09/09	0.00	03/09/09	0.00	04/09/09	0.00	05/09/09	0.00	06/09/09	0.00	07/09/09	0.15	08/09/09	0.00	09/09/09	0.00	10/09/09	0.00	11/09/09	0.00	12/09/09	0.00		
01/10/09	0.00	02/10/09	0.00	03/10/09	0.00	04/10/09	0.00	05/10/09	0.00	06/10/09	0.00	07/10/09	1.60	08/10/09	0.00	09/10/09	0.00	10/10/09	0.04	11/10/09	0.59	12/10/09	0.47		
01/11/09	0.00	02/11/09	0.00	03/11/09	0.00	04/11/09	0.00	05/11/09	0.00	06/11/09	0.00	07/11/09	0.00	08/11/09	0.00	09/11/09	0.42	10/11/09	0.00	11/11/09	0.01	12/11/09	0.00		
01/12/09	0.00	02/12/09	0.00	03/12/09	0.00	04/12/09	0.00	05/12/09	0.07	06/12/09	0.07	07/12/09	0.21	08/12/09	0.23	09/12/09	0.42	10/12/09	0.00	11/12/09	0.01	12/12/09	0.00		
01/13/09	0.24	02/13/09	0.00	03/13/09	0.61	04/13/09	0.61	05/13/09	0.06	06/13/09	0.06	07/13/09	0.01	08/13/09	0.45	09/13/09	0.28	10/13/09	0.00	11/13/09	0.00	12/13/09	0.00		
01/14/09	0.00	02/14/09	0.00	03/14/09	0.00	04/14/09	0.00	05/14/09	0.88	06/14/09	0.28	07/14/09	0.00	08/14/09	0.57	09/14/09	0.01	10/14/09	0.00	11/14/09	0.00	12/14/09	0.00		
01/15/09	0.00	02/15/09	0.00	03/15/09	0.00	04/15/09	0.00	05/15/09	0.00	06/15/09	0.05	07/15/09	0.38	08/15/09	0.54	09/15/09	0.00	10/15/09	0.57	11/15/09	0.00	12/15/09	0.00		
01/16/09	0.00	02/16/09	0.00	03/16/09	0.00	04/16/09	0.00	05/16/09	0.00	06/16/09	0.00	07/16/09	0.01	08/16/09	0.00	09/16/09	0.00	10/16/09	0.35	11/16/09	0.00	12/16/09	0.01		
01/17/09	0.00	02/17/09	0.01	03/17/09	0.00	04/17/09	0.00	05/17/09	0.00	06/17/09	0.48	07/17/09	0.00	08/17/09	0.76	09/17/09	0.01	10/17/09	0.00	11/17/09	0.00	12/17/09	0.00		
01/18/09	0.00	02/18/09	0.00	03/18/09	0.00	04/18/09	0.00	05/18/09	0.00	06/18/09	1.54	07/18/09	0.06	08/18/09	0.05	09/18/09	0.00	10/18/09	0.00	11/18/09	0.00	12/18/09	0.00		
01/19/09	0.00	02/19/09	0.00	03/19/09	0.00	04/19/09	0.00	05/19/09	0.00	06/19/09	3.63	07/19/09	0.23	08/19/09	0.01	09/19/09	0.00	10/19/09	0.00	11/19/09	0.00	12/19/09	0.01		
01/20/09	0.01	02/20/09	0.01	03/20/09	0.00	04/20/09	0.00	05/20/09	0.08	06/20/09	1.38	07/20/09	0.31	08/20/09	0.01	09/20/09	0.00	10/20/09	0.00	11/20/09	0.00	12/20/09	0.00		
01/21/09	0.00	02/21/09	0.00	03/21/09	0.00	04/21/09	0.00	05/21/09	0.00	06/21/09	0.23	07/21/09	0.00	08/21/09	1.43	09/21/09	0.00	10/21/09	0.00	11/21/09	0.01	12/21/09	0.00		
01/22/09	0.00	02/22/09	0.00	03/22/09	0.00	04/22/09	0.00	05/22/09	0.00	06/22/09	0.28	07/22/09	0.00	08/22/09	0.46	09/22/09	0.00	10/22/09	0.00	11/22/09	0.43	12/22/09	0.00		
01/23/09	0.00	02/23/09	0.00	03/23/09	0.00	04/23/09	0.00	05/23/09	0.00	06/23/09	2.77	07/23/09	0.00	08/23/09	0.01	09/23/09	0.00	10/23/09	0.00	11/23/09	0.02	12/23/09	0.00		
01/24/09	0.00	02/24/09	0.00	03/24/09	0.01	04/24/09	0.01	05/24/09	0.00	06/24/09	0.50	07/24/09	0.01	08/24/09	0.00	09/24/09	0.06	10/24/09	0.00	11/24/09	0.02	12/24/09	0.00		
01/25/09	0.00	02/25/09	0.00	03/25/09	0.00	04/25/09	0.00	05/25/09	0.02	06/25/09	0.02	07/25/09	0.00	08/25/09	0.39	09/25/09	0.00	10/25/09	0.00	11/25/09	0.44	12/25/09	0.09		
01/26/09	0.00	02/26/09	0.00	03/26/09	0.00	04/26/09	0.00	05/26/09	0.00	06/26/09	0.85	07/26/09	0.00	08/26/09	0.30	09/26/09	0.09	10/26/09	0.12	11/26/09	0.00	12/26/09	0.00		
01/27/09	0.00	02/27/09	0.00	03/27/09	0.00	04/27/09	0.00	05/27/09	0.00	06/27/09	0.21	07/27/09	0.00	08/27/09	1.26	09/27/09	0.24	10/27/09	0.14	11/27/09	0.00	12/27/09	0.00		
01/28/09	0.00	02/28/09	0.00	03/28/09	0.00	04/28/09	0.00	05/28/09	0.00	06/28/09	0.30	07/28/09	0.77	08/28/09	0.00	09/28/09	0.00	10/28/09	0.01	11/28/09	0.00	12/28/09	0.00		
01/29/09	0.54	02/29/09	0.00	03/29/09	0.02	04/29/09	0.00	05/29/09	0.00	06/29/09	0.00	07/29/09	0.11	08/29/09	0.02	09/29/09	0.01	10/29/09	0.00	11/29/09	0.00	12/29/09	0.00		
01/30/09	0.33			03/30/09	0.00	04/30/09	0.00	05/30/09	0.00	06/30/09	0.00	07/30/09	1.09	08/30/09	0.00	09/30/09	0.00	10/30/09	0.00	11/30/09	0.00	12/30/09	0.00		
01/31/09	0.00			03/31/09	0.02			05/31/09	0.00	06/31/09	0.00	07/31/09	0.01	08/31/09	0.00	09/31/09	0.00	10/31/09	0.00	11/31/09	0.00	12/31/09	0.00		
Total	1.12				0.12		0.06		1.60		12.65		3.08		7.98		6.88		2.20		1.24		1.53		2009 Annual Total = 42.40



Notes: 1) in. = inches
2) Shaded cells indicate periods when rain gage was inoperable. Values shown were obtained from SWFWMD monitoring site #9074 in Webster, Florida

TABLE 6
GROUNDWATER DRAWDOWN/MOUNDING DATA SUMMARY
CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC - CENTER HILL MINE
JUNE 2006 THROUGH DECEMBER 2009

Cemex Well ID DID No. Date	MW-19 19			MW-20 20			MW-21 21			MW-50 50			MW-51 51			MW-55 55			MW-60 60			MW-61 61			MW-64 64			MW-66 66			MW-67 67			MW-68 68			BG-1 86	BG-2 87	BG-3 88	BG-4 N/A			
	IGW	AGW	DIGW	AGW	AGW	AGW	AGW																																				
06/28/06	82.9	82.0	-0.9	83.8	81.9	-1.9	84.5	82.4	-2.1	78.8	77.7	-1.1	82.7	83.8	1.1	79.3	77.4	-1.9	80.2	81.4	1.2	80.8	81.7	0.9	78.6	71.3	-7.3	79.0	76.8	-2.3	83.6	83.5	-0.1	81.7	83.2	1.5	82.26	81.81	76.28	NR			
07/26/06	82.5	81.6	-0.9	83.4	81.3	-2.1	84.0	81.6	-2.4	78.3	77.1	-1.2	82.2	83.3	1.1	78.8	77.6	-1.2	79.7	81.1	1.4	80.3	81.4	1.1	78.1	70.2	-7.9	78.6	76.3	-2.3	83.1	83.1	0.0	81.2	82.8	1.6	81.89	81.23	75.75	NR			
08/30/06	NR	80.5	NR	NR	80.0	NR	NR	80.3	NR	NR	76.5	NR	NR	82.5	NR	NR	77.3	NR	NR	80.4	NR	NR	80.5	NR	NR	69.6	NR	NR	NR	75.9	NR	NR	NR	81.9	NR	NR	NR	82.0	NR	NR	80.52	74.88	NR
09/27/06	81.4	79.4	-2.0	82.4	79.5	-2.9	83.1	80.0	-3.1	77.1	76.1	-1.0	81.2	82.2	1.0	77.6	77.0	-0.6	78.6	77.1	-1.5	79.2	79.0	-0.2	76.8	69.2	-7.6	77.3	75.5	-1.8	82.1	81.5	-0.6	80.2	81.3	1.1	80.49	80.68	74.40	NR			
10/25/06	80.4	78.3	-2.1	81.4	78.4	-3.0	82.1	78.9	-3.2	76.3	75.8	-0.5	80.2	81.0	0.8	76.8	77.4	0.6	77.7	79.4	1.7	78.4	79.4	1.0	76.1	69.2	-6.9	76.5	75.5	-1.0	81.1	80.7	-0.4	79.3	80.3	1.0	79.58	79.69	73.81	NR			
11/29/06	79.7	78.3	-1.4	80.7	78.0	-2.7	81.3	78.1	-3.2	75.8	75.7	-0.1	79.6	79.6	0.0	76.3	77.1	0.8	77.2	79.3	2.1	77.7	79.1	1.4	75.6	69.1	-6.5	76.0	75.4	-0.6	80.4	78.8	-1.6	78.6	79.9	1.3	78.95	78.94	73.45	NR			
12/27/06	79.5	79.2	-0.4	80.3	78.5	-1.8	80.9	78.3	-2.6	75.6	75.5	-0.1	79.2	78.2	-1.0	76.0	77.0	1.0	76.9	78.7	1.8	77.4	78.6	1.2	75.4	69.4	-6.0	75.8	75.3	-0.5	80.0	78.0	-2.0	78.4	79.1	0.7	78.69	78.53	73.24	NR			
01/31/07	79.0	78.6	-0.4	79.9	78.0	-1.9	80.4	77.9	-2.5	75.4	75.2	-0.2	78.8	77.1	-1.7	75.8	76.8	1.0	76.6	77.3	0.7	77.1	77.3	0.2	75.2	69.3	-5.9	75.6	75.2	-0.4	79.6	77.5	-2.1	78.0	77.6	-0.4	78.39	78.13	73.08	NR			
02/28/07	78.9	76.8	-2.1	79.7	76.9	-2.9	80.2	77.8	-2.4	75.4	79.0	3.6	78.7	82.6	3.9	75.8	82.7	6.9	76.6	82.9	6.3	77.1	82.1	5.0	75.2	79.2	4.0	75.5	81.2	5.7	79.4	81.0	1.6	77.9	83.8	5.9	78.24	78.03	73.22	NR			
03/28/07	78.5	76.2	-2.3	79.2	76.2	-3.0	79.6	77.2	-2.4	75.4	79.0	3.6	78.3	82.2	3.9	75.8	82.5	6.7	76.5	82.7	6.2	76.9	82.1	5.2	75.2	79.3	4.1	75.6	81.3	5.7	78.9	80.6	1.7	77.6	83.3	5.7	77.89	77.79	73.58	NR			
04/25/07	78.0	75.7	-2.3	78.7	75.6	-3.2	79.2	76.2	-3.0	74.9	78.9	4.0	77.8	81.7	3.9	75.3	82.0	6.7	76.0	82.5	6.5	76.4	81.7	5.3	74.7	79.1	4.4	75.1	80.7	5.6	78.4	79.9	1.5	77.1	82.9	5.8	77.39	77.32	73.13	NR			
05/30/07	77.1	74.2	-2.9	77.8	74.8	-3.0	78.2	75.6	-2.6	74.1	78.3	4.2	76.9	80.9	4.0	74.4	81.6	7.1	75.1	82.1	7.0	75.6	81.2	5.6	73.9	78.9	5.0	74.2	80.2	6.0	77.5	78.9	1.4	76.2	82.6	6.4	76.44	76.48	72.33	NR			
06/27/07	76.7	74.9	-1.8	77.4	74.6	-2.8	77.8	75.4	-2.4	73.9	78.2	4.3	76.6	80.8	4.2	74.2	80.6	6.4	74.8	81.7	6.9	75.3	81.2	5.9	73.7	78.4	4.7	74.1	79.5	5.4	77.2	78.7	1.5	75.9	82.5	6.6	76.09	76.24	72.23	NR			
07/25/07	77.2	73.6	-3.6	78.1	74.0	-4.1	78.7	75.2	-3.5	74.1	78.1	4.0	77.3	81.2	3.9	74.4	81.4	6.9	75.2	82.4	7.2	75.8	81.9	6.1	73.7	78.7	5.0	74.2	79.7	5.5	78.0	79.0	1.0	76.5	83.1	6.6	76.19	77.49	72.08	NR			
08/29/07	77.5	74.4	-3.1	78.4	74.3	-4.1	78.9	75.7	-3.2	75.1	79.2	4.1	77.9	81.9	4.0	75.3	81.6	6.3	76.2	82.8	6.6	76.8	82.7	5.9	74.7	79.1	4.4	75.2	80.4	5.2	78.4	79.7	1.3	77.3	83.6	6.3	76.13	79.20	73.47	NR			
09/26/07	77.0	74.5	-2.5	77.8	74.4	-3.5	78.3	75.7	-2.6	75.1	79.5	4.4	77.5	82.1	4.6	75.3	82.0	6.7	76.1	82.9	6.8	76.6	82.9	6.3	74.7	79.6	4.9	75.2	81.0	5.8	77.9	79.7	1.8	77.0	83.8	6.8	75.77	79.43	73.91	NR			
10/31/07	78.4	75.3	-3.1	79.3	75.3	-4.0	79.8	76.9	-2.9	76.3	80.0	3.7	79.0	82.6	3.6	76.6	82.3	5.7	77.4	83.3	5.9	78.0	83.7	5.7	75.9	79.9	4.0	76.4	81.6	5.2	79.4	80.6	1.2	78.5	84.2	5.7	78.75	81.05	74.94	NR			
11/28/07	78.2	72.8	-5.4	79.0	72.9	-6.1	79.5	75.1	-4.4	76.1	78.2	2.1	78.7	81.6	2.9	76.3	76.7	0.4	77.2	82.4	5.2	77.7	82.6	4.9	75.7	77.2	1.5	76.1	77.7	1.6	79.1	79.5	0.4	78.2	83.1	4.9	76.74	80.19	74.68	NR			
12/26/07	77.3	71.0	-6.3	78.2	71.3	-6.9	78.7	73.9	-4.8	75.4	77.7	2.3	77.9	80.9	3.0	75.6	77.1	1.5	76.4	81.7	5.3	76.9	81.9	5.0	74.9	77.5	2.6	75.4	77.9	2.5	78.3	78.9	0.6	77.4	82.4	5.0	75.86	79.62	74.03	NR			
01/30/08	77.9	71.8	-6.1	78.7	72.1	-6.6	79.2	74.5	-4.7	76.2	78.5	2.3	78.5	81.2	2.7	76.4	78.3	1.8	77.2	82.0	4.8	77.8	82.6	4.8	75.8	78.5	2.7	76.2	78.9	2.7	78.8	79.3	0.5	78.2	82.8	4.6	76.29	80.66	75.08	NR			
02/20/08	78.1	71.2	-6.9	78.9	71.5	-7.4	79.4	74.2	-5.2	76.2	78.4	2.2	78.7	81.4	2.7	76.4	79.3	2.8	77.2	81.9	4.7	77.8	82.7	4.9	75.7	79.5	3.8	76.2	79.6	3.4	79.1	79.3	0.2	78.2	83.1	4.9	76.49	80.60	74.88	NR			
03/26/08	78.7	71.5	-7.2	79.5	71.8	-7.7	79.9	74.4	-5.5	77.1	78.6	1.5	79.2	80.7	1.5	77.2	78.5	1.2	78.0	81.1	3.1	78.5	81.8	3.3	76.7	78.0	1.3	77.1	78.6	1.5	79.6	78.5	-1.1	78.9	81.9	3.0	77.29	81.06	75.88	NR			
04/30/08	79.3	71.8	-7.5	80.0	72.0	-8.1	80.4	74.4	-6.0	77.1	78.6	1.5	79.7	80.3	0.6	77.4	78.9	1.5	78.1	80.8	2.7	78.6	81.3	2.7	76.7	78.3	1.6	77.2	78.8	1.6	80.1	78.9	-1.2	79.2	81.5	2.3	77.99	80.89	75.65	NR			
05/28/08	77.8	70.9	-6.9	78.6	70.8	-7.8	79.1	73.6	-5.5	75.7	77.3	1.6	78.3	79.5	1.2	75.9	78.9	3.0	76.7	80.8	4.1	77.3	80.7	3.4	75.3	78.2	2.9	75.7	78.7	3.0	78.7	78.5	-0.2	77.7	81.0	3.3	76.54	79.70	74.28	NR			
06/25/08	75.2	70.7	-4.5	75.7	70.9	-4.9	76.1	73.0	-3.1	74.2	77.6	3.4	75.8	79.9	4.1	74.3	79.4	5.1	75.0	80.0	5.0	75.4	80.3	4.9	74.2	78.3	4.1	74.2	78.7	4.5	75.9	78.3	2.4	75.6	81.2	5.6	75.54	78.56	73.46	77.15			
07/30/08	78.0	72.7	-5.3	78.4	73.0	-5.4	78.8	75.6	-3.2	77.3	80.1	2.8	78.6	81.5	2.9	77.3	81.1	3.8	78.0	82.1	4.1	78.3	81.6	3.3	77.2	80.9	3.7	77.3	81.0	3.7	78.7	79.8	1.1	78.5	82.0	3.5	77.97	81.36	76.78	79.45			
08/27/08	81.2	75.5	-5.7	81.6	78.5	-3.1	82.0	80.8	-1.2	80.6	81.6	1.0	81.8	82.2	0.4	80.7	82.2	1.5	81.2	82.6	1.4	81.5	83.5	2.0	80.4	81.6	1.2	80.6	82.3	1.7	81.9	81.2	-0.7	81.7	83.1	1.4	81.08	84.32	80.08	82.66			
09/24/08	79.6	75.5	-4.1	79.8	77.9	-1.9	80.0	79.8	-0.2	78.6	80.5	1.9	79.7	81.4	1.7	78.7	81.8	3.1	79.1	81.9	2.8	79.4	82.3	2.9	78.6	81.1	2.5	78.6	81.4	2.8	79.8	81.0	1.2	79.5	82.3	2.8	79.78	82.49	77.99	81.42			
10/29/08	78.4	75.0	-3.4	78.7	74.7	-4.0	79.0	77.0	-2.0	77.3	80.2	2.9	78.7	81.1	2.4	77.4	82.1	4.7	77.9	82.3	4.4	78.2	81.6	3.4	77.3	NR	NR	77.4	81.5	4.1	78.8	80.0	1.2	78.5	82.1	3.6	78.53	81.15	76.60	80.29			
11/26/08	77.5	74.2	-3.3	77.7	74.1	-3.6	78.0	76.2	-1.8	76.4	79.7	3.3	77.7	80.8	3.1	76.5	81.8	5.3	77.0	81.8	4.8	77.3	81.2	3.9	76.3	80.9	4.6	76.4	81.1	4.7	77.8	79.6	1.8	77.5	81.9	4.4	77.55	80.25	75.67	79.37			
12/30/08	76.5	73.4	-3.1	76.8	73.6	-3.3	77.0	75.1	-1.9	75.4	79.2	3.8	76.7	80.8	4.1	75.5	81.7	6.2	76.0	81.4	5.4	76.3	81.1	4.8	75.3	80.8	5.5	75.4	80.8	5.4	76.8	79.2	2.4	76.5	81.8	5.3	76.49	79.40	74.63	78.45			
01/28/09	75.8	72.9	-2.9	76.3	73.0	-3.3	76.7	74.6	-2.1	74.9	78.9	4.0	76.4	80.7	4.3	74.9	81.5	6.6	75.6	81.2	5.6	75.9	80.8	4.9	74.7	80.7	6.0	74.8	80.6	5.8	76.5	79.0	2.5	76.2	81.7	5.5	75.85						

FIGURES

C:\CIVIL 3D PROJECTS\S-262AC CENTER HILL MINE\DWG\SUBMITTALS\2009 WATER ANALYSIS\2009 WATER ANALYSIS REPORT.DWG

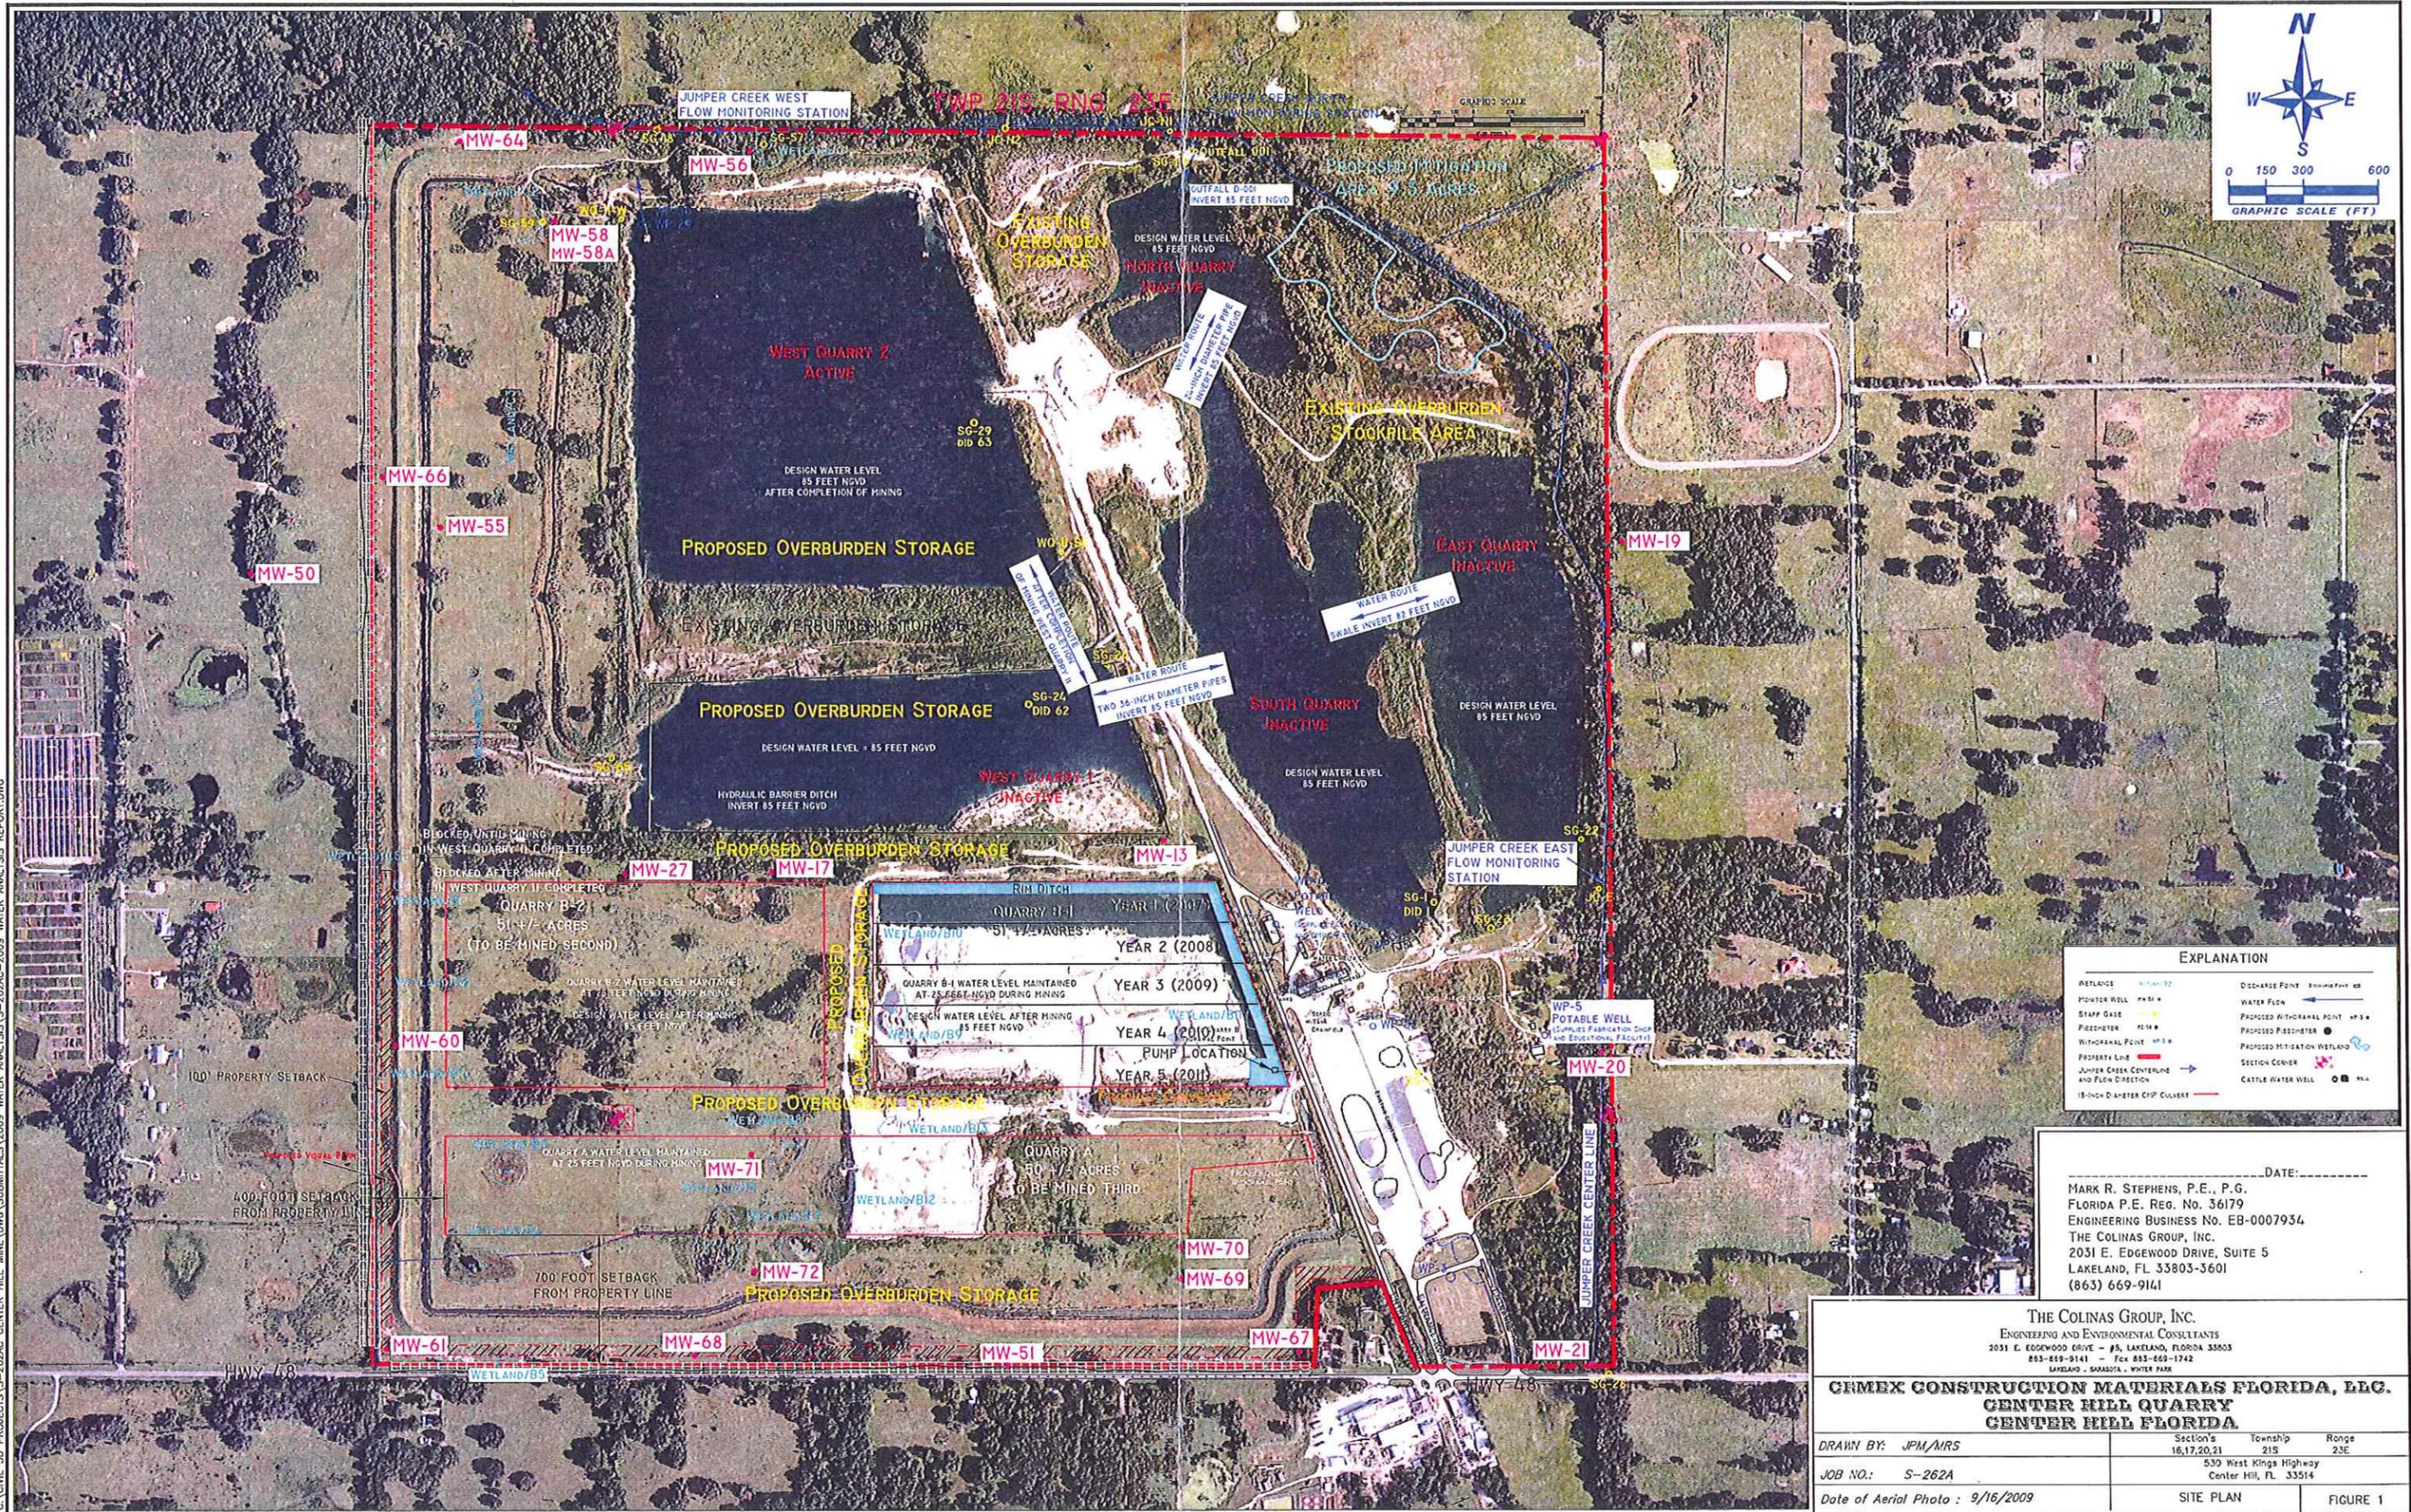

EXPLANATION



WETLANDS	WETLAND/B1	DISCHARGE POINT	DISCHARGE POINT
MONITOR WELL	MW-51	WATER FLOW	WATER FLOW
STAMP GASE	SG-1	PROCESSED WITHDRAWAL POINT	PROCESSED WITHDRAWAL POINT
PUMP/CHUCKER	PM-1	PROCESSED FILL/CHUCKER	PROCESSED FILL/CHUCKER
WITHDRAWAL POINT	WP-1	PROPOSED MITIGATION WETLAND	PROPOSED MITIGATION WETLAND
PROPERTY LINE	PL-1	SECTION CENTER	SECTION CENTER
JUMPER CREEK CENTERLINE AND FLOW DIRECTION	JC-1	CATTLE WATER WELL	CATTLE WATER WELL
18-INCH DIAMETER CRIP COLLECTOR	CRIP-1		

DATE: _____
 MARK R. STEPHENS, P.E., P.G.
 FLORIDA P.E. REG. NO. 36179
 ENGINEERING BUSINESS NO. EB-0007934
 THE COLINAS GROUP, INC.
 2031 E. EDGEWOOD DRIVE, SUITE 5
 LAKELAND, FL 33803-3601
 (863) 669-9141

THE COLINAS GROUP, INC.
 ENGINEERING AND ENVIRONMENTAL CONSULTANTS
 2031 E. EDGEWOOD DRIVE - #5, LAKELAND, FLORIDA 33803
 863-669-9141 - Fax 863-669-1742
 BAYLAND - SARASOTA - WINTER PARK

CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC.
CENTER HILL QUARRY
CENTER HILL FLORIDA

DRAWN BY: JPM/MRS	Section's 16,17,20,21	Township 21S	Range 23E
JOB NO.: S-262A	530 West Kings Highway Center Hill, FL 33514		
Date of Aerial Photo: 9/16/2009	SITE PLAN		FIGURE 1

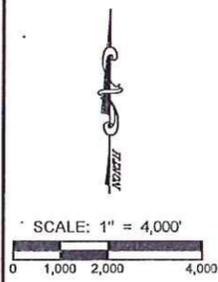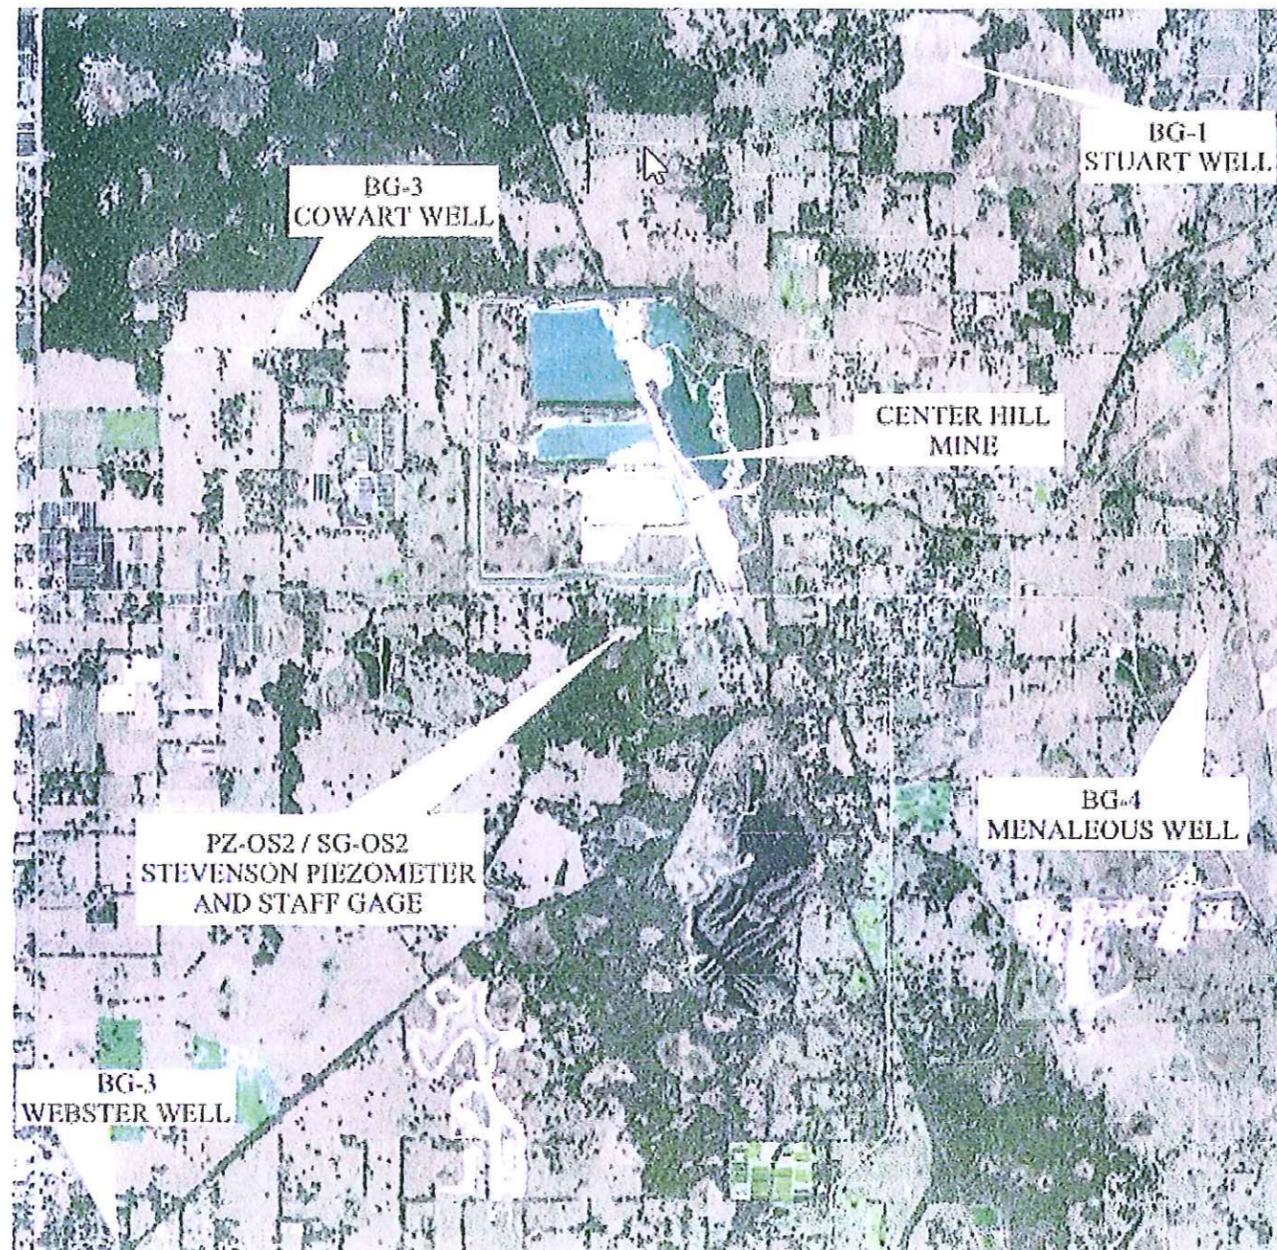


CEMEX CONSTRUCTION MATERIALS FLORIDA, LLC	DATE 01/05/10	JOB NO. S-262AC	FIGURE NO. 2
<p>THE COLINAS GROUP, INC. ENGINEERING AND ENVIRONMENTAL CONSULTANTS 2031 E. EDGEWOOD DRIVE - #5, LAKELAND, FLORIDA 33803 863-669-9141 - Fax 863-669-1742 LAKELAND . SARASOTA . WINTER PARK</p>	<p>OFFSITE MONITOR WELL, PIEZOMETER AND STAFF GAGE LOCATIONS</p> <p>CENTER HILL MINE SUMTER COUNTY, FLORIDA</p>		


APPENDIX A

Ground Water Elevations


Graph A-1
Ground Water Elevations
July 2005 through December 2009
Monitor Wells MW-13, MW-17 and MW-27
Cemex Construction Materials Florida, LLC - Center Hill Mine

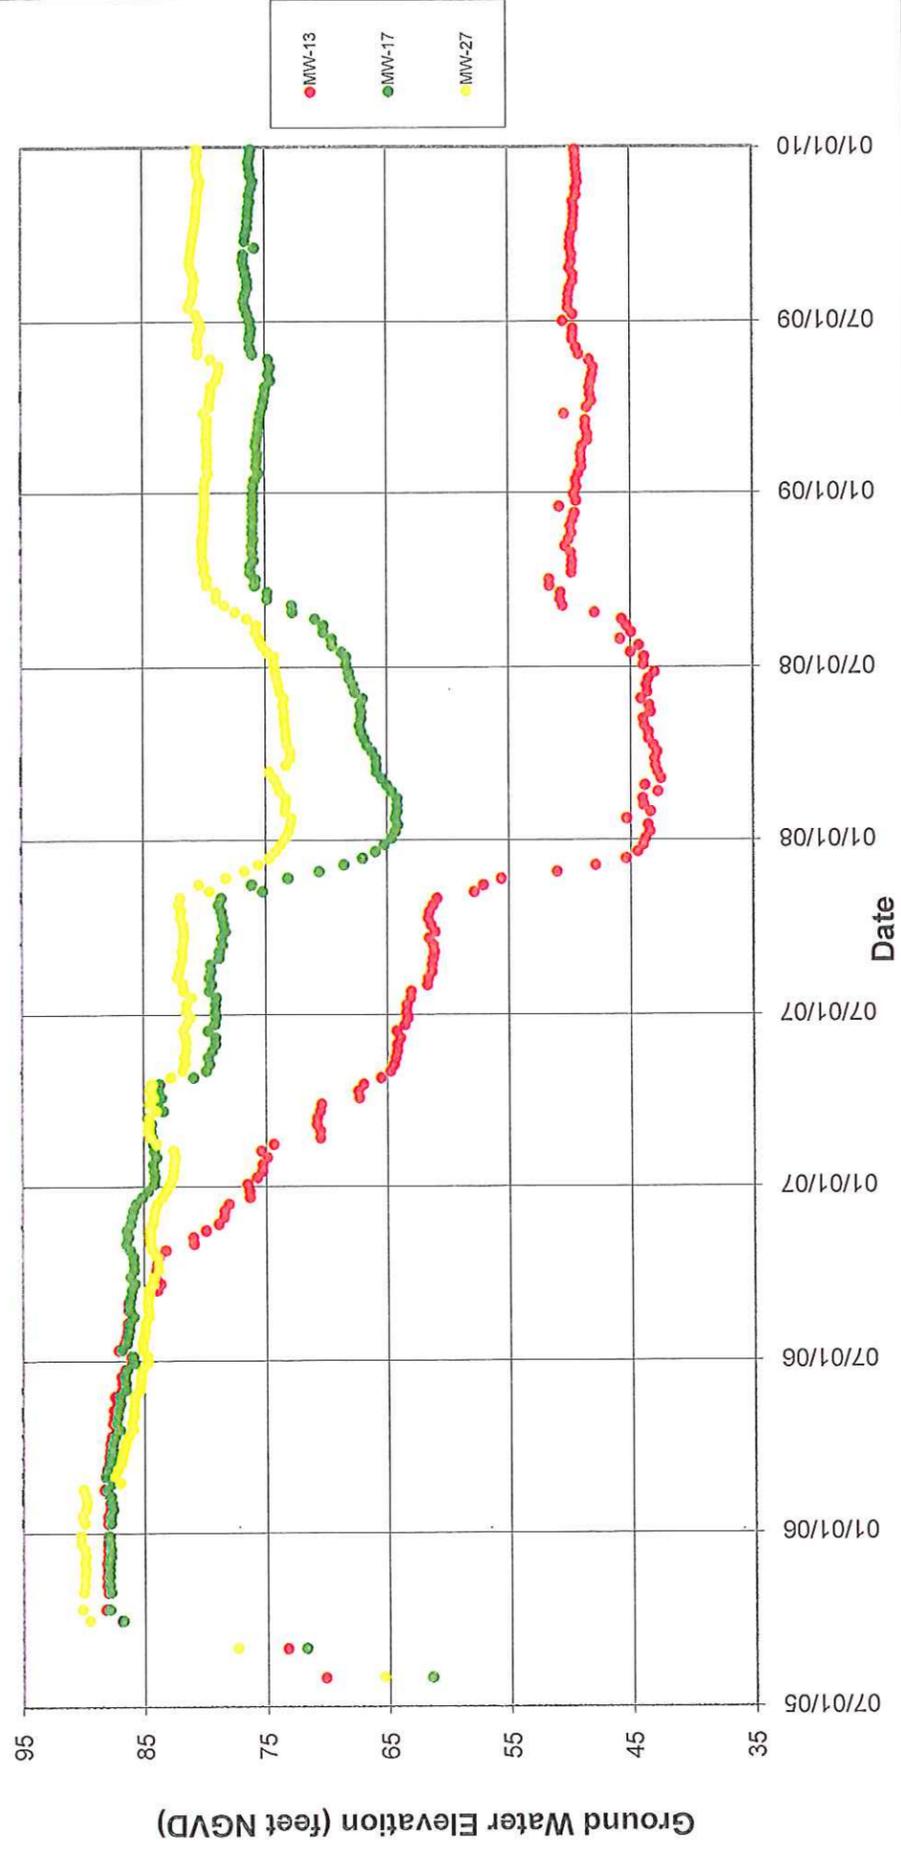


Graph A-2
Ground Water Elevations
November 2005 through December 2009
Monitor Wells MW-19, MW-20 and MW-21
Cemex Construction Materials Florida, LLC - Center Hill Mine

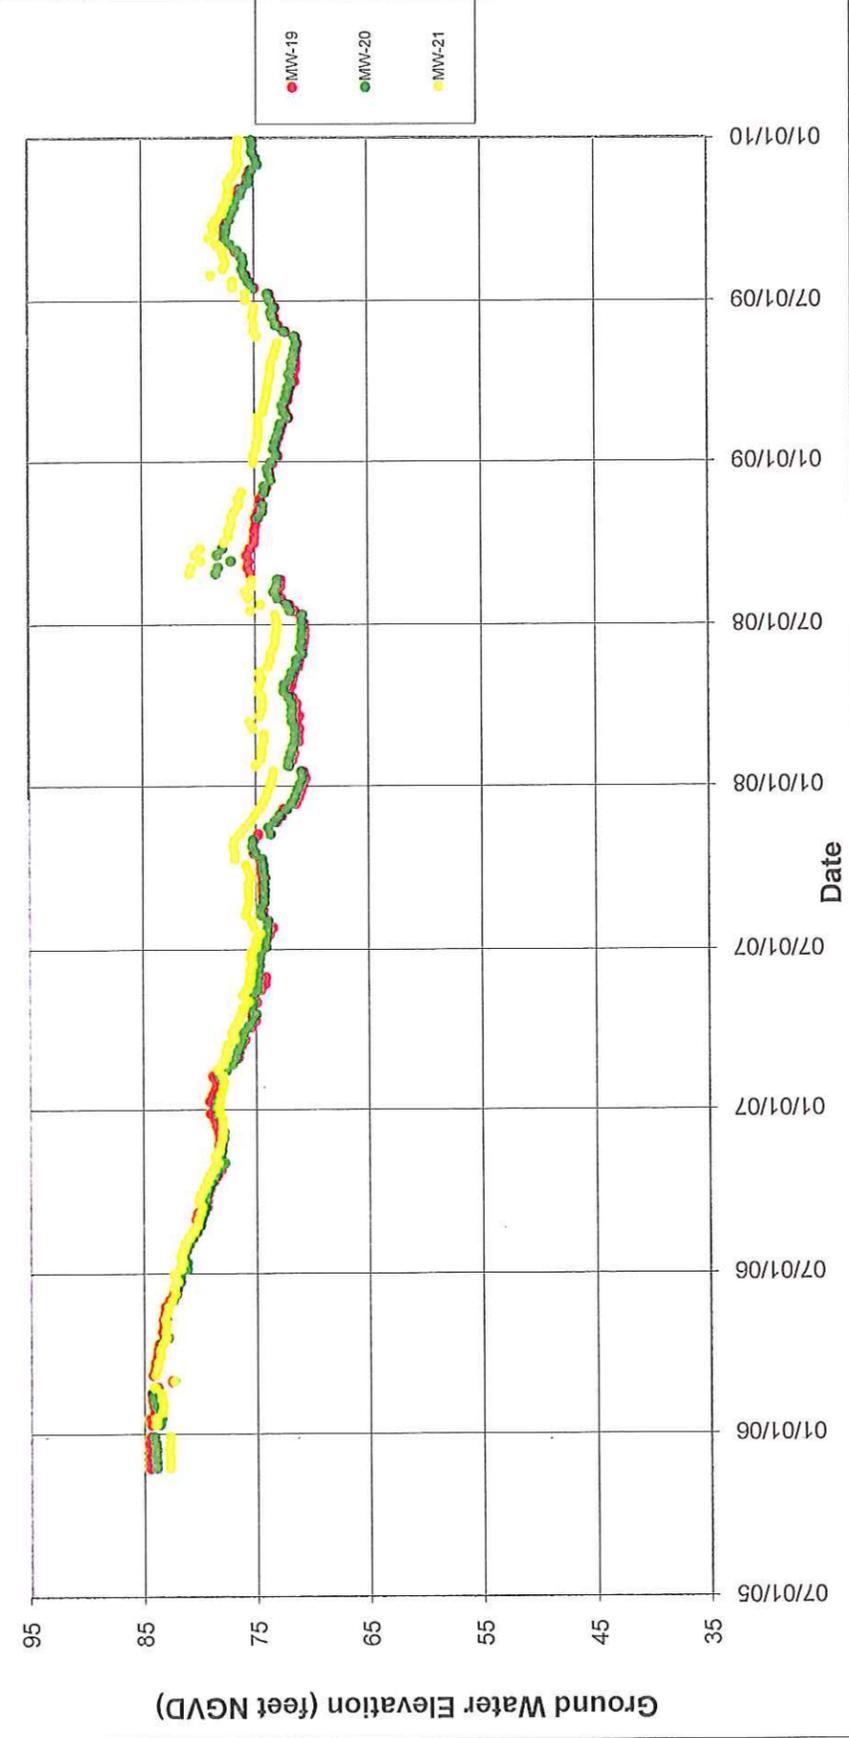


Graph A-3
Ground Water Elevations
July 2005 through December 2009
Monitor Wells MW-50, MW-55, MW-60, MW-64 and MW-66
Cemex Construction Materials Florida, LLC - Center Hill Mine

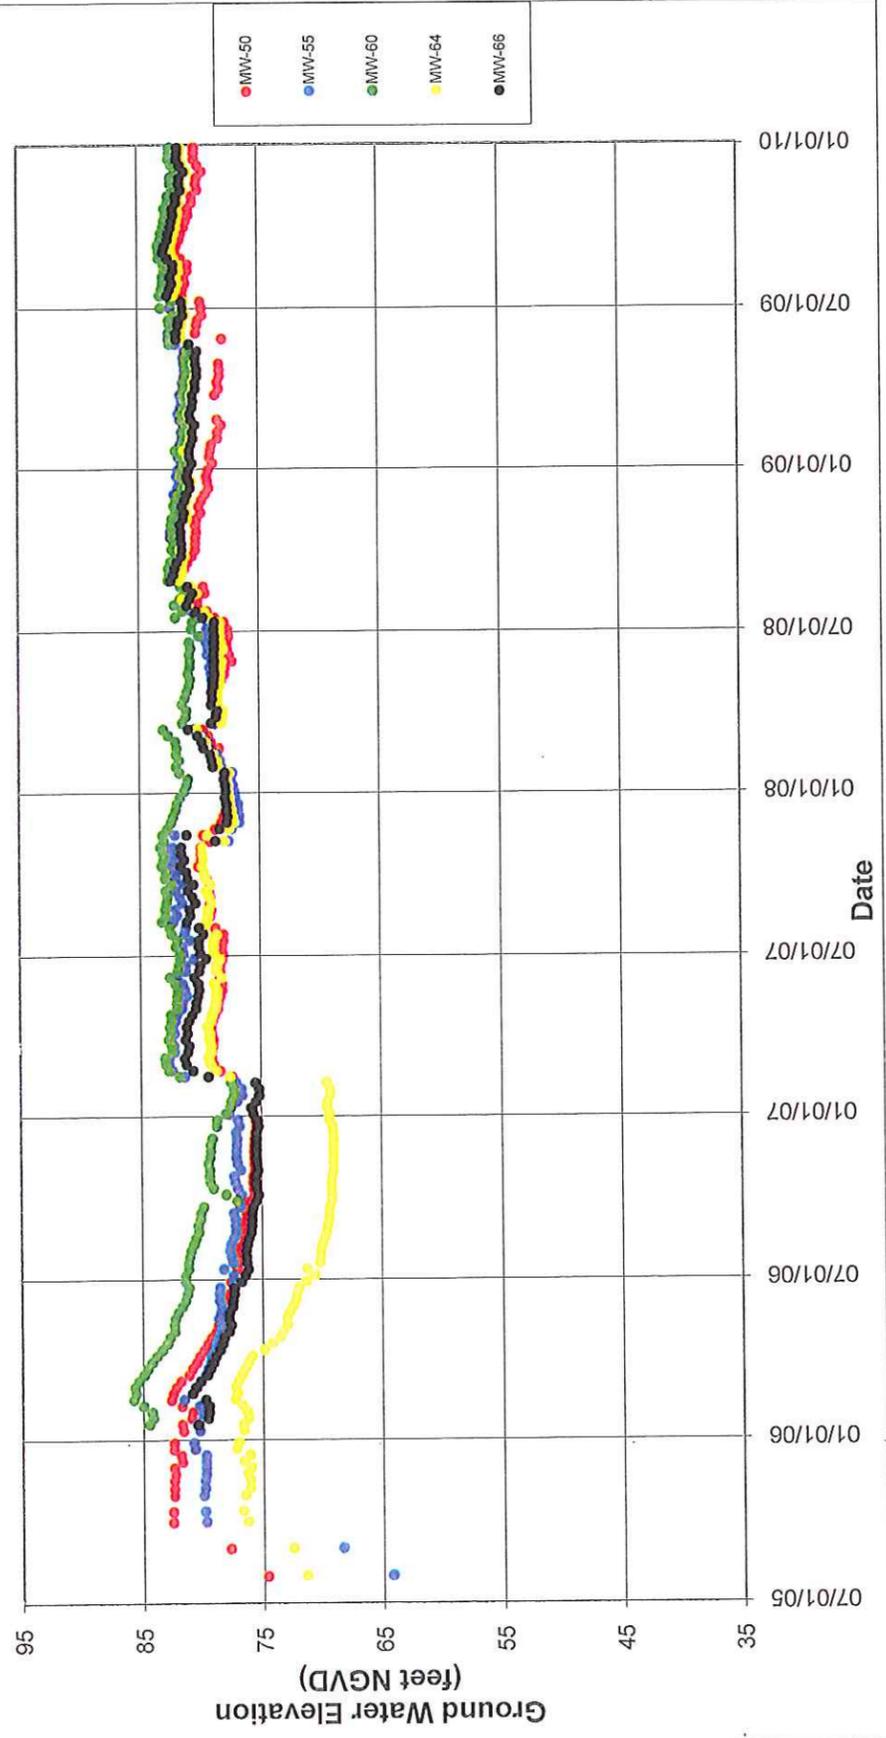

Graph A-4
Ground Water Elevations
July 2005 through December 2009
Monitor Wells MW-51, MW-61, MW-67 and MW-68
Cemex Construction Materials Florida, LLC - Center Hill Mine

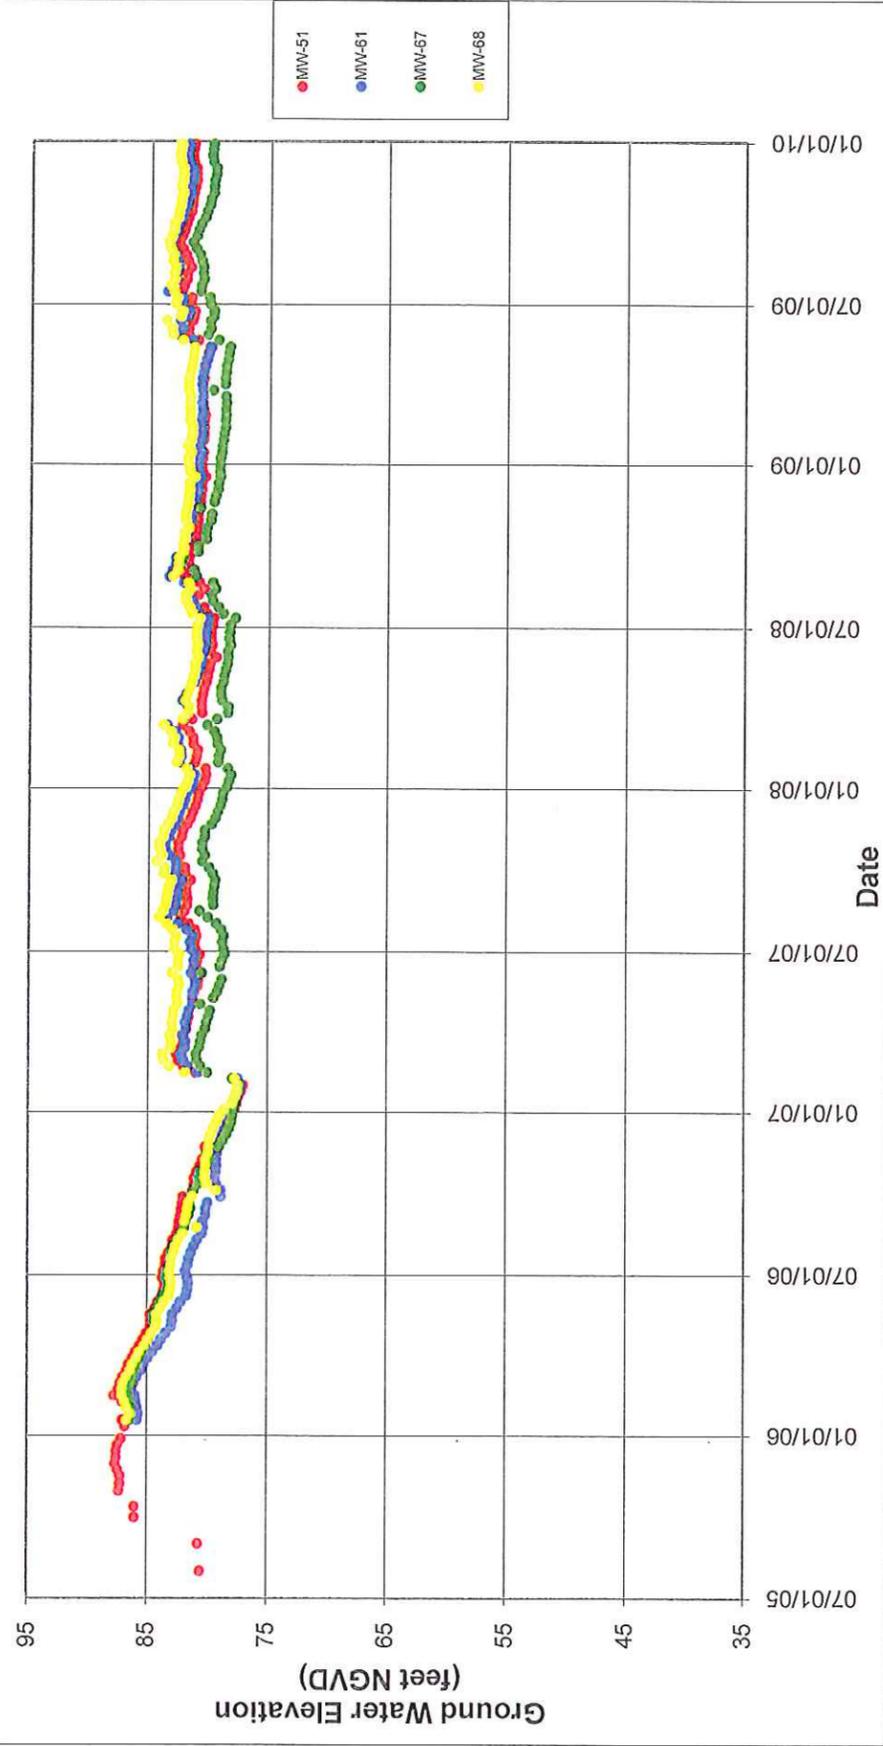

Graph A-5
Ground Water Elevations
September 2006 through December 2009
Monitor Wells MW-69, MW-70, MW-71 and MW-72
Cemex Construction Materials Florida, LLC - Center Hill Mine

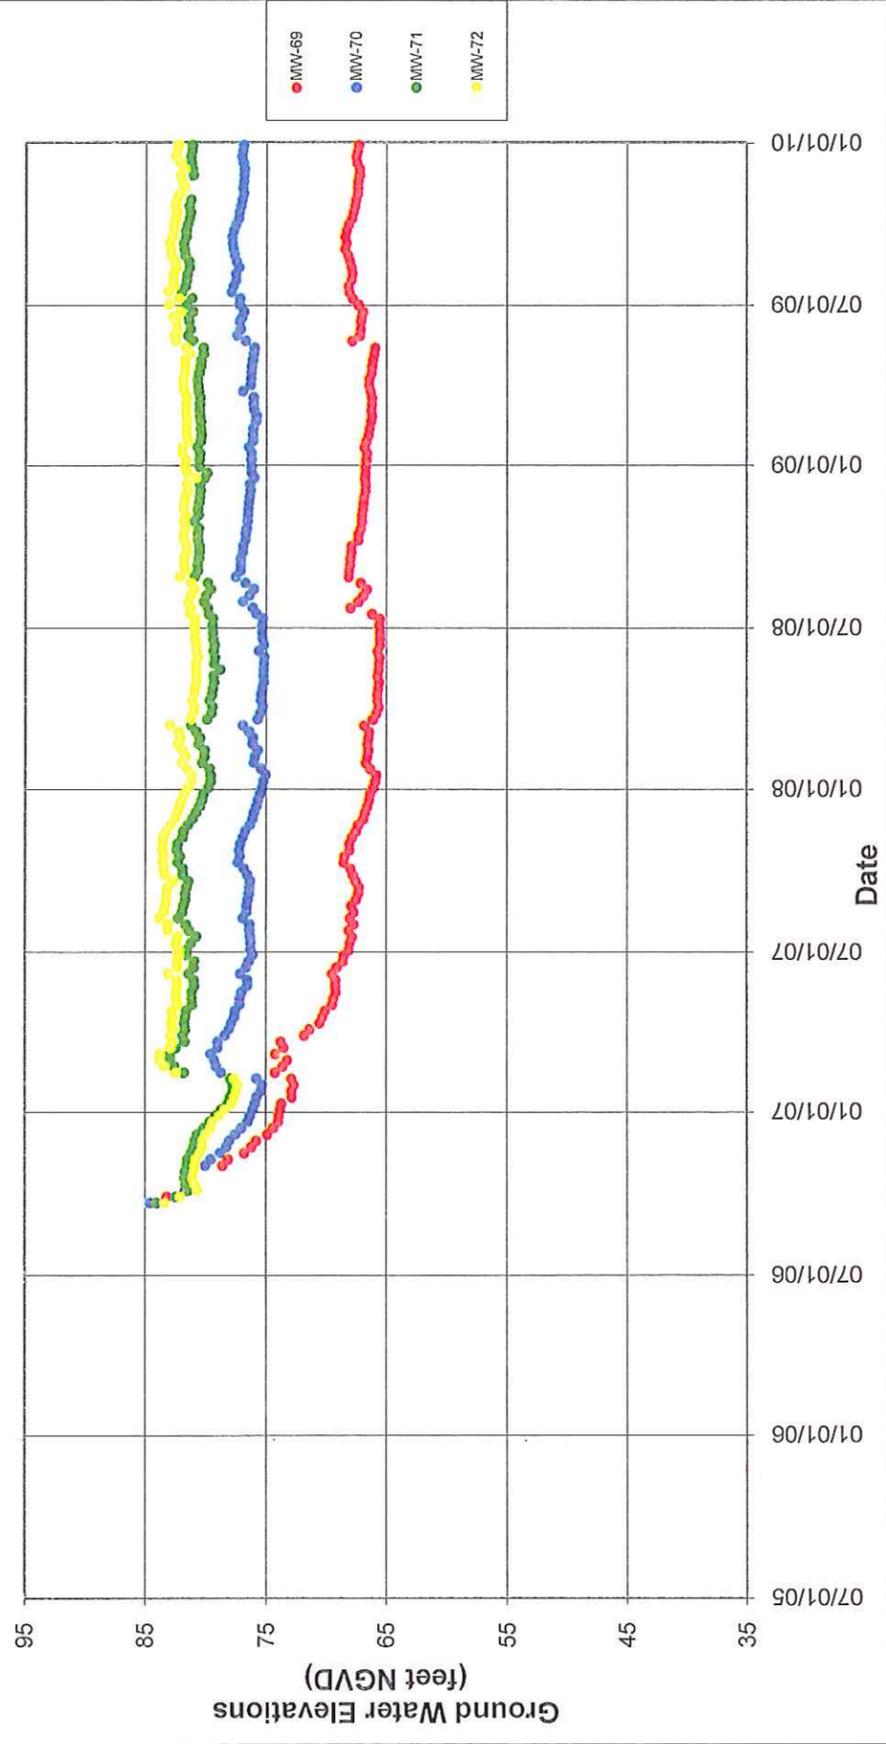

Graph A-6
Ground Water Elevations
September 2005 through December 2009
Background Monitor Wells BG-1 (Stuart), BG-2 (Webster), BG-3 (Cownt) and BG-4 (Menaleous)
Cemex Construction Materials Florida, LLC - Center Hill Mine

